

2SK1434


Ultrahigh-Speed Switching Applications

Features

- · Low ON-state resistance.
- · Ultrahigh-speed switching.
- \cdot Converters.

Package Dimensions

unit:mm

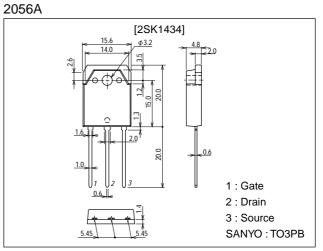

Specifications

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Drain-to-Source Voltage	V _{DSS}		100	V
Gate-to-Source Voltage	VGSS		±20	V
Drain Current (DC)	۱ _D		60	A
Drain Current (Pulse)	I _{DP}	PW≤10µs, duty cycle≤1%	240	A
Allowable Power Dissipation	PD	Tc=25°C	150	W
	r D		2.5	W
Channel Temperature	Tch		150	°C
Storage Temperature	Tstg		-55 to +150	°C

Electrical Characteristics at Ta = 25°C

Symbol	Conditions	Ratings			Unit
		min	typ	max	Onit
V(BR)DSS	I _D =1mA, V _{GS} =0	100			V
IDSS	V _{DS} =100V, V _{GS} =0			100	μΑ
IGSS	V _{GS} =±20V, V _{DS} =0			±100	nA
VGS(off)	V _{DS} =10V, I _D =1mA	1.5		2.5	V
yfs	V _{DS} =10V, I _D =40A	27	45		S
R _{DS(on)}	I _D =40A, V _{GS} =10V		0.023	0.035	Ω
	V(BR)DSS IDSS IGSS VGS(off) yfs	V(BR)DSS ID=1mA, VGS=0 IDSS VDS=100V, VGS=0 IGSS VGS=±20V, VDS=0 VGS(off) VDS=10V, ID=1mA I yfs VDS=10V, ID=40A	V(BR)DSS ID=1mA, VGS=0 100 IDSS VDS=100V, VGS=0 100 IGSS VGS=±20V, VDS=0 100 VGS(off) VDS=10V, ID=1mA 1.5 yfs VDS=10V, ID=40A 27	Symbol Conditions min typ V(BR)DSS ID=1mA, VGS=0 100 100 IDSS VDS=100V, VGS=0 100 100 IGSS VGS=±20V, VDS=0 100 100 VGS(off) VDS=10V, ID=1mA 1.5 145 I yfs VDS=10V, ID=40A 27 45	Symbol Conditions min typ max V(BR)DSS ID=1mA, VGS=0 100 100 100 IDSS VDS=100V, VGS=0 100 100 100 IGSS VGS=±20V, VDS=0 ±100 ±100 VGS(off) VDS=10V, ID=1mA 1.5 2.5 yfs VDS=10V, ID=40A 27 45

(Note) Be careful in handling the 2SK1434 because it has no protection diode between gate and source.

Continued on next page.


- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges,or other parameters) listed in products specifications of any and all SANYO products described or contained herein.


SANYO Electric Co., Ltd. Semiconductor Company TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN


Continued from preceding page.

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	Unit
Input Capacitance	Ciss	V _{DS} =20V, f=1MHz		4800		pF
Output Capacitance	Coss	V _{DS} =20V, f=1MHz		1400		pF
Reverse Transfer Capacitance	Crss	V _{DS} =20V, f=1MHz		400		pF
Turn-ON Delay Time	^t d(on)	I_D =40A, V_{GS} =10V, V_{DD} =50V, R_{GS} =50 Ω		45		ns
Rise Time	tr	I_D =40A, V_{GS} =10V, V_{DD} =50V, R_{GS} =50 Ω		195		ns
Turn-OFF Delay Time	^t d(off)	I_D =40A, V_{GS} =10V, V_{DD} =50V, R_{GS} =50 Ω		560		ns
Fall Time	t _f	$I_{D}\text{=}40\text{A},V_{GS}\text{=}10\text{V},V_{DD}\text{=}50\text{V},R_{GS}\text{=}50\Omega$		240		ns
Diode Forward Voltage	V _{SD}	I _S =60A, V _{GS} =0			1.8	V

Switching Time Test Circuit



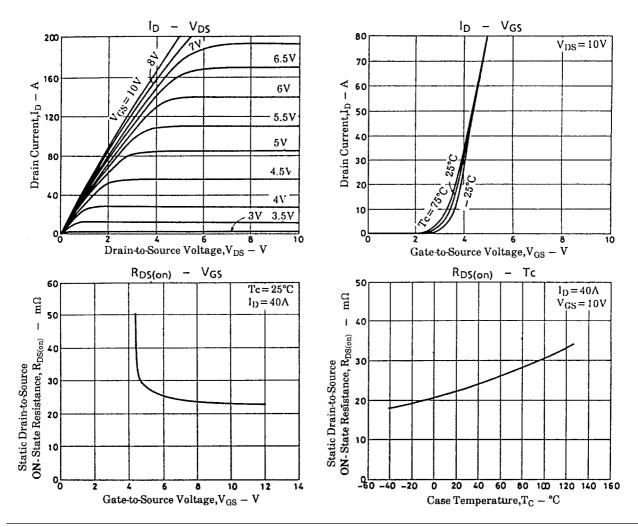

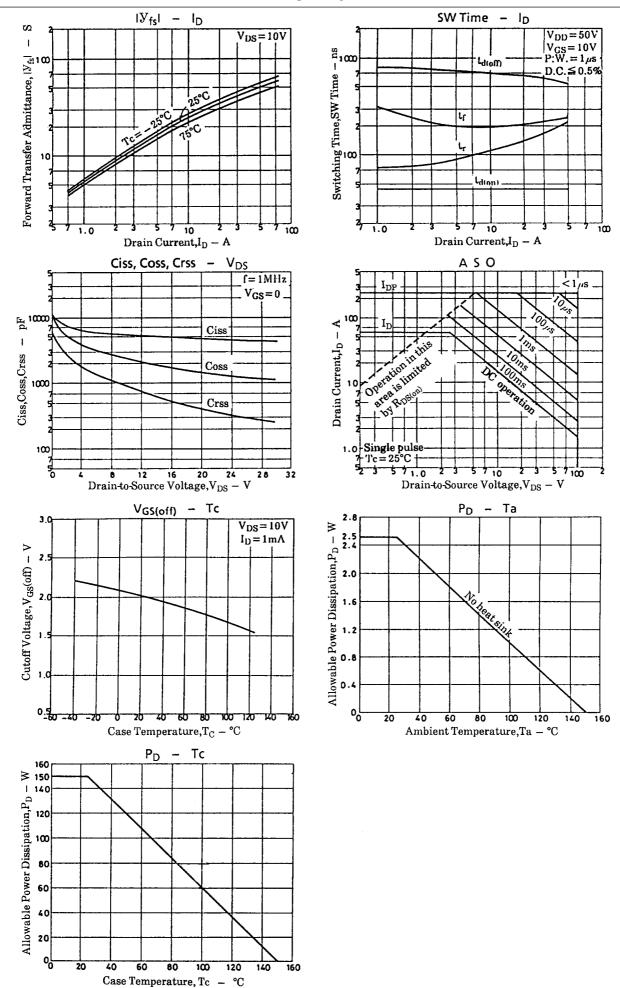

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of May, 1999. Specifications and information herein are subject to change without notice.