


2SA1481/2SC2960**High-Speed Switching Applications****Features**

- Fast switching speed.
- High breakdown voltage.

Package Dimensions

unit:mm

2033

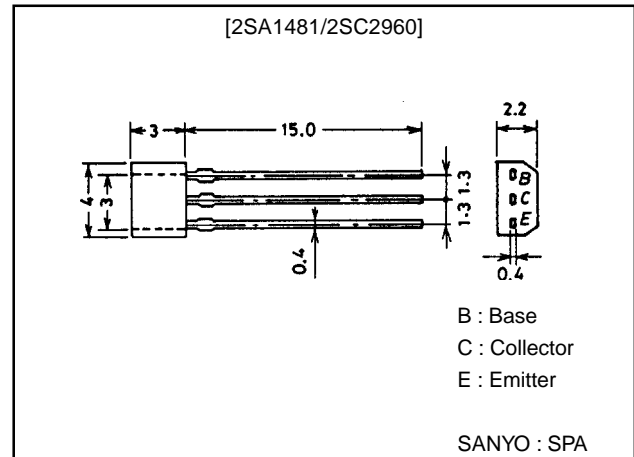

() : 2SA1481

Specifications**Absolute Maximum Ratings at Ta = 25°C**

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CB0}		(-)60	V
Collector-to-Emitter Voltage	V_{CEO}		(-)50	V
Emitter-to-Base Voltage	V_{EBO}		(-)5	V
Collector Current	I_C		(-)150	mA
Peak Collector Current	I_{CP}		(-)400	mA
Collector Dissipation	P_C		250	mW
Junction Temperature	T_j		150	°C
Storage Temperature	T_{stg}		-55 to +150	°C

Electrical Characteristic at Ta = 25°C

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	$V_{CB} = (-)400V, I_E = 0$			(-)0.1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = (-)4V, I_C = 0$			(-)0.1	μA
DC Current Gain	h_{FE}	$V_{CE} = (-)6V, I_C = (-)1mA$	100*		560*	
Gain-Bandwidth Product	f_T	$V_{CE} = (-)6V, I_C = (-)1mA$		100		MHz
Output Capacitance	C_{ob}	$V_{CB} = (-)6V, f = 1MHz$		2.7		pF
				(4.0)		pF
Collector-to-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = (-)10mA, I_B = (-)1mA$		(-)0.1	(-)0.4	V
Base-to-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = (-)10mA, I_B = (-)1mA$		(-)0.75	(-)1.1	V
Collector-to-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = (-)10\mu A, I_E = 0$	(-)60			V
Collector-to-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = (-)1mA, R_{BE} = \infty$	(-)50			V
Emitter-to-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = (-)10\mu A, I_C = 0$	(-)5			V
Delay Time	t_d	See specified Test Circuit		40	60	ns
Rise Time	t_r	See specified Test Circuit		80	130	ns
				(120)	(230)	ns
Storage Time	t_{stg}	See specified Test Circuit		230	450	ns
				(190)	(700)	ns
Fall Time	t_f	See specified Test Circuit		160	250	ns
				(240)	(390)	ns

* ; The 2SA1481/2SC2960 are classified by 1mA h_{FE} as follows :


100 E	200	160 F	320	280 G	560
-------	-----	-------	-----	-------	-----

SANYO Electric Co., Ltd. Semiconductor Business Headquarters







TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

Switching Time Test Circuit









(For PNP, the polarity is reversed.)

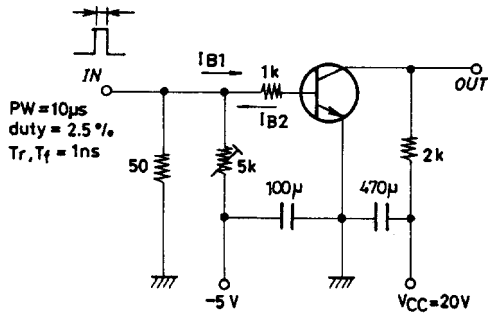






$10 I_{B1} = -10 I_{B2} = I_C = 10 \text{ mA}$
 Unit (resistance : Ω , capacitance : F)

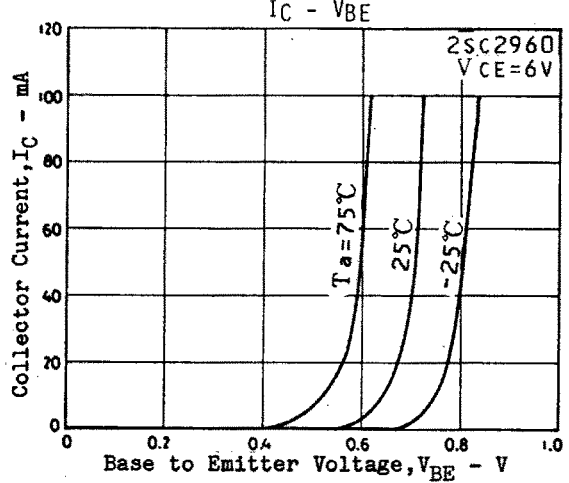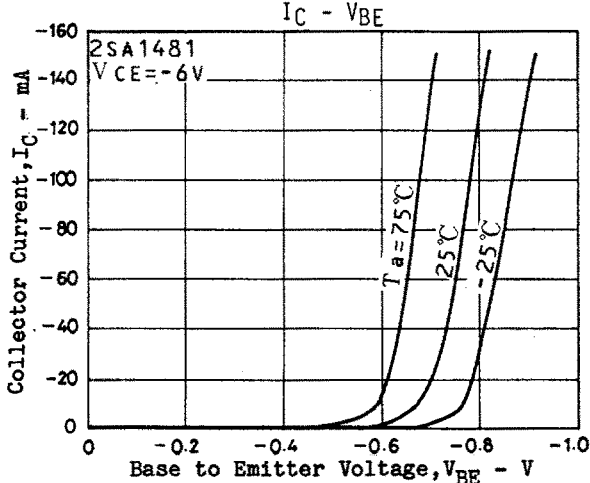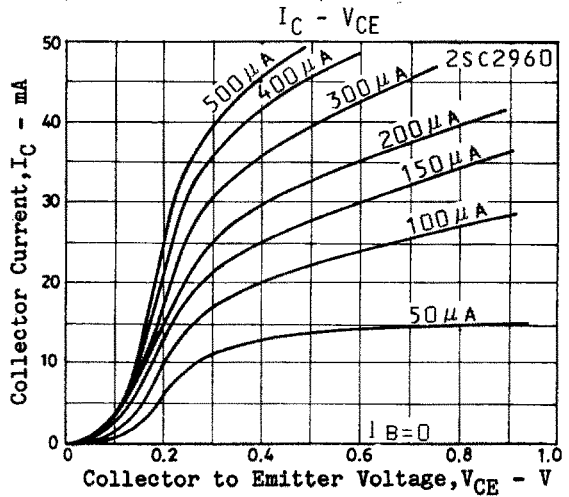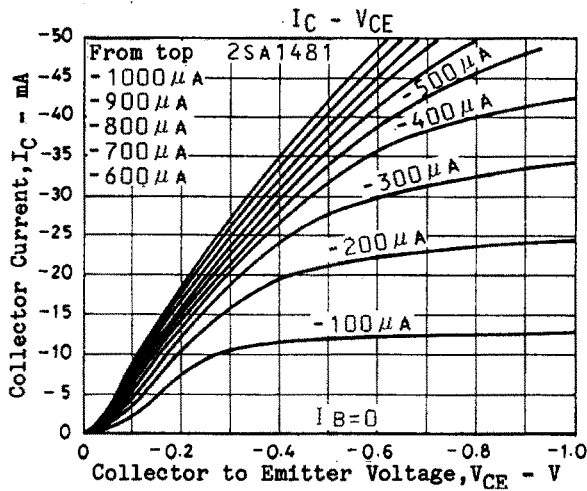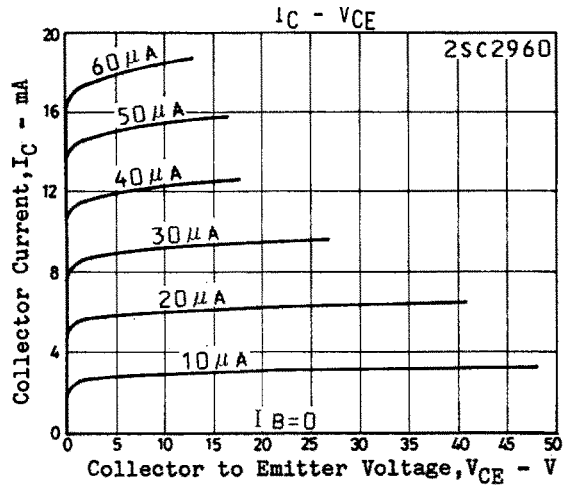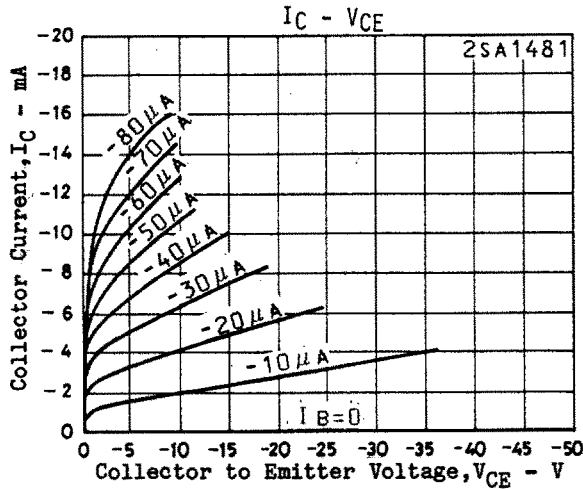

2SA1481/2SC2960

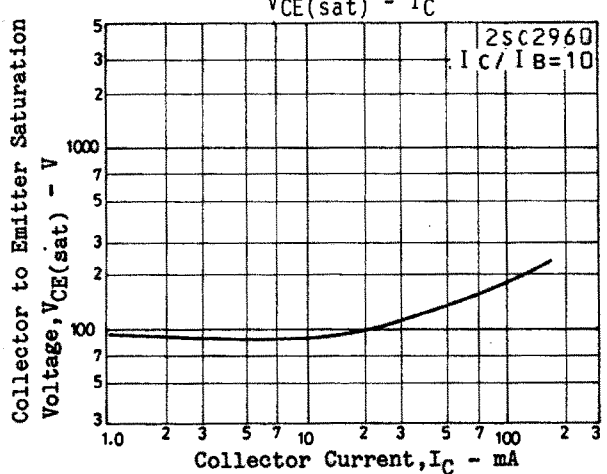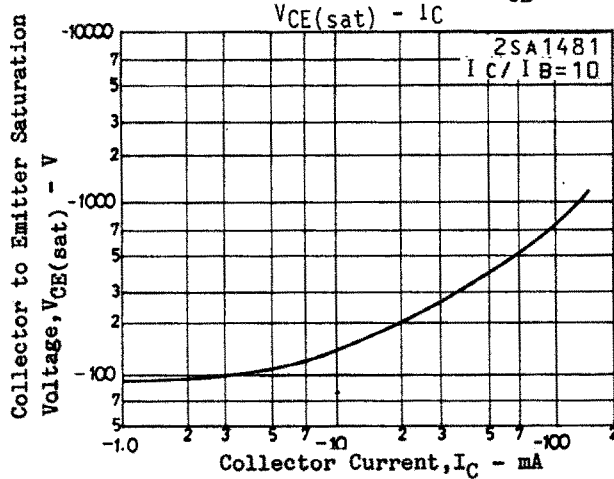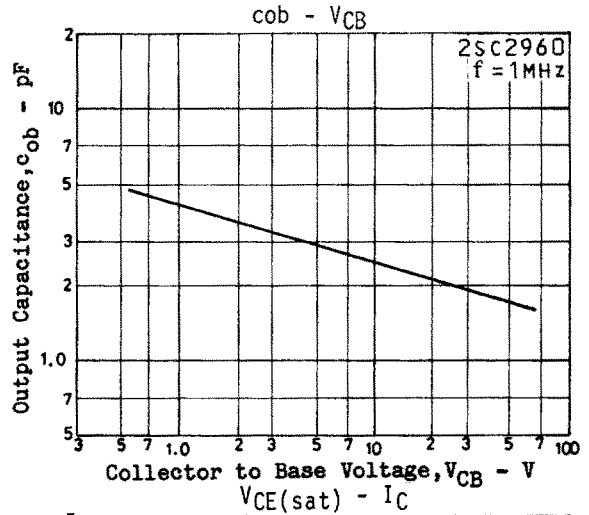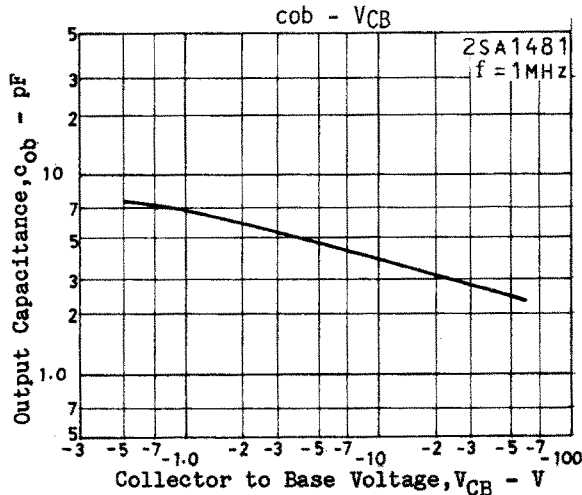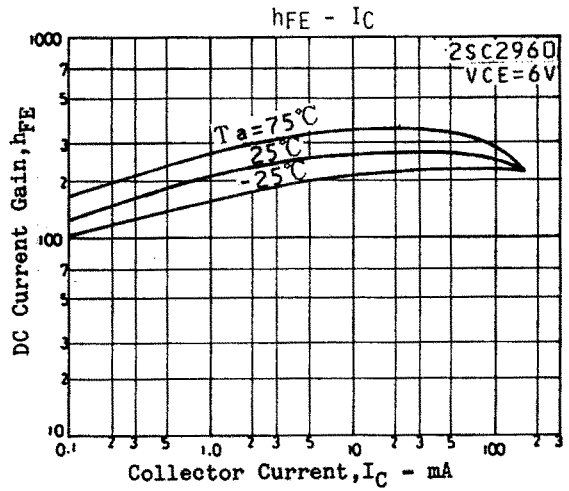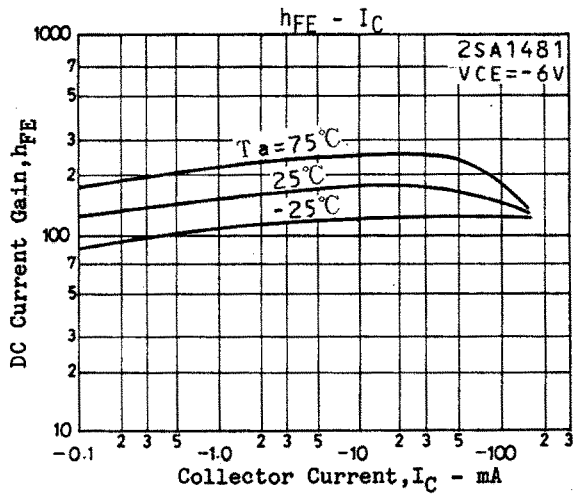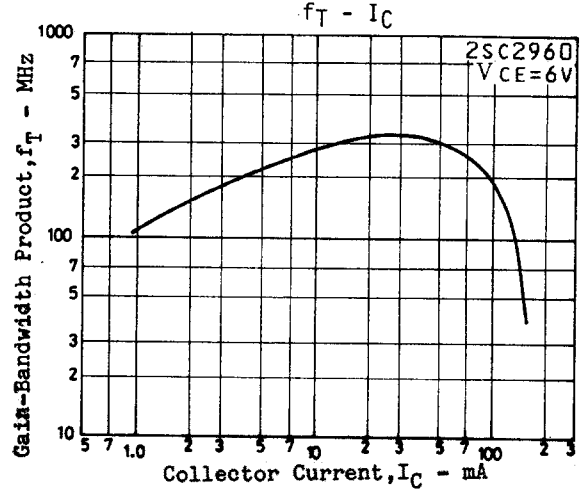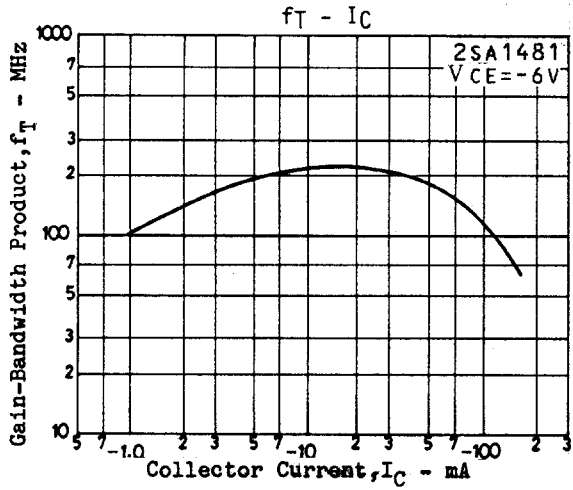

2SA1481/2SC2960

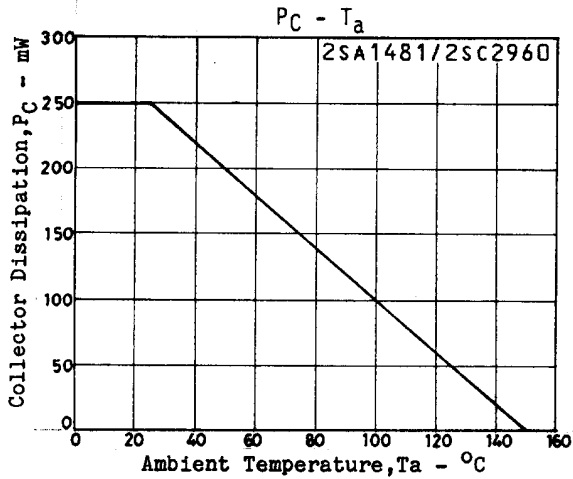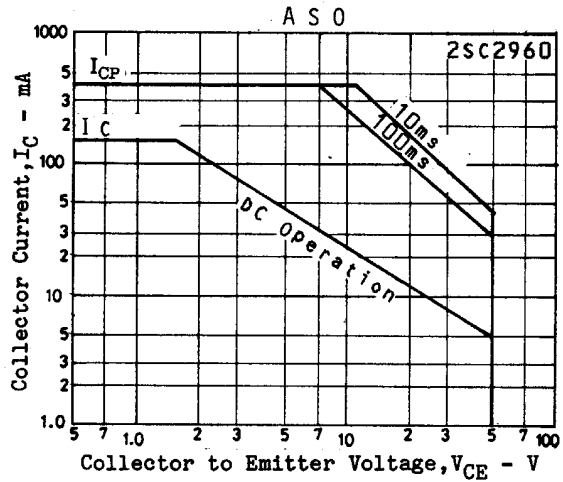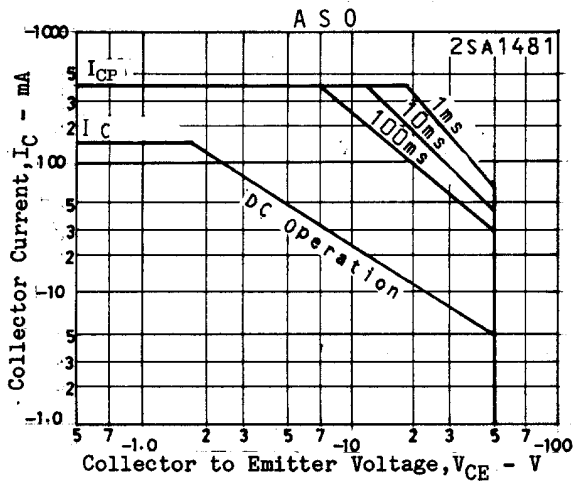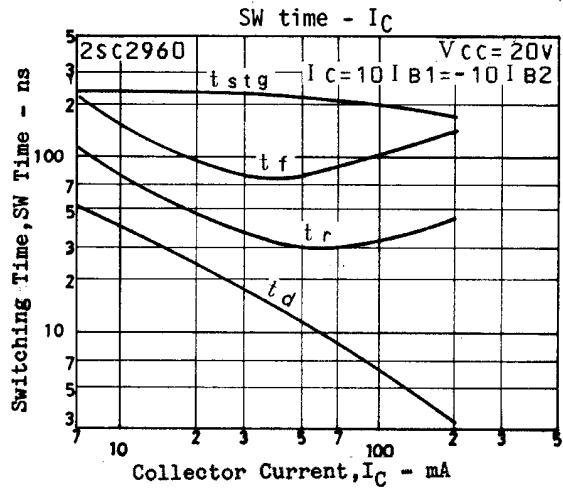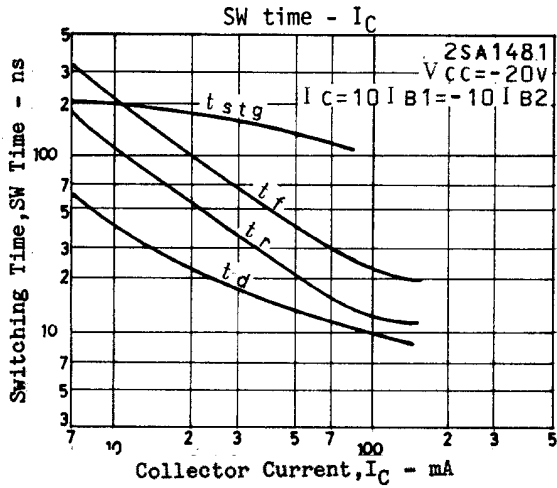

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of July, 1998. Specifications and information herein are subject to change without notice.