

2SK2218

High-Frequency Low-Noise Amplifier Applications


Features

- · Adoption of FBET process.
- · Amateur radio equipment.
- · UHF amplifiers, MIX, OSC, analog switches.
- \cdot Large | y_{fs} |.
- · Small Ciss.

Package Dimensions

unit:mm

2125



Specifications

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Drain-to-Source Voltage	V _{DSX}		15	V
Gate-to-Drain Voltage	V _{GDS}		-15	V
Gate Current	IG		10	mA
Drain Current	ID		100	mA
Allowable Power Dissipation	D-		400	mW
Allowable Power Dissipation	P _D	Mounted on ceramic board (250mm ² ×0.8mm)	800	mW
Junction Temperature	Tj		150	°C
Storage Temperature	Tstg		-55 to +150	°C

Electrical Characteristics at Ta = 25°C

Parameter	Symbol	Conditions	Ratings			Unit
Farameter	Symbol	Symbol		typ	max	Offic
Gate-to-Drain Breakdown Voltage	V(BR)GDS	I_{G} =-10 μ A, V_{DS} =0	-15			V
Gate-to-Source Leakage Current	IGSS	V_{GS} =-10V, V_{DS} =0			-1.0	nA
Zero-Gate Voltage Drain Current	I _{DSS} **	$V_{DS}=5V$, $V_{GS}=0$	40*		75*	mA
Cutoff Voltage	VGS(off)	V _{DS} =5V, I _D =100μA	-1.2	-2.6	-4.5	V
Forward Transfer Admittance	yfs	V _{DS} =5V, V _{GS} =0, f=1kHz	24	32		mS

^{**:} Pulse Test Pulse Width≤2mS

*: The 2SK2218 is classified by I_{DSS} as follows (unit: mA).

40 3 52 48 4 63 57 5 75

Marking: KN I_{DSS} ranks: 3, 4, 5


- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges,or other parameters) listed in products specifications of any and all SANYO products described or contained herein.


SANYO Electric Co., Ltd. Semiconductor Company


Continued on next page.


Continued from preceding page.

Parameter	Symbol	Conditions		Ratings		
Farameter	Symbol		min	typ	max	Unit
Input Capacitance	Ciss	V_{DS} =5V, V_{GS} =0, f=1MHz		5.5		pF
Reverse Transfer Capacitance	Crss	V_{DS} =5V, V_{GS} =0, f=1MHz		1.6		pF
Noise Figure	NF	V_{DS} =5V, Rg=1k Ω , I $_{D}$ =5mA, f=1kHz		1.3		dB
Static Drain-to-Source ON-State Resistance	R _{DS(on)}	I _D =10mA, V _{GS} =0		30		Ω

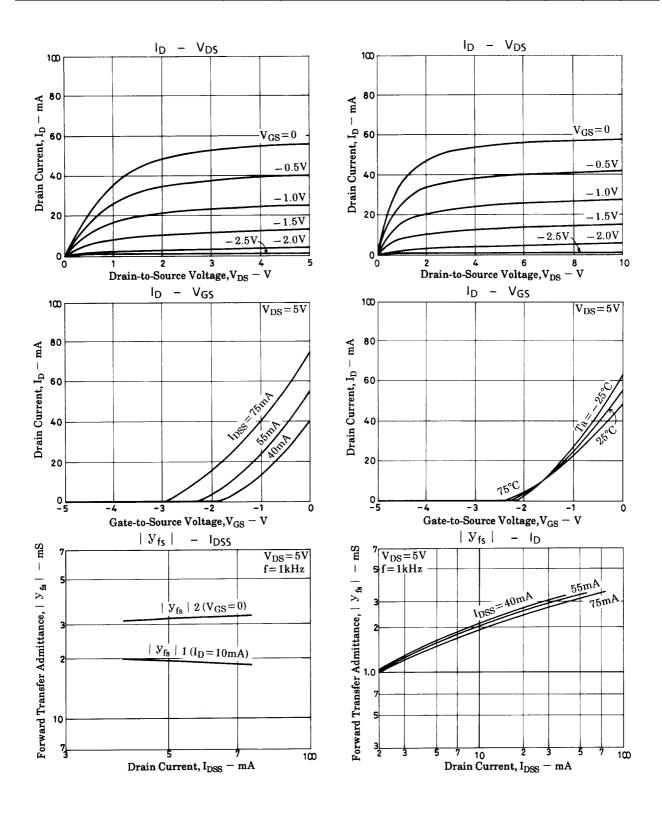

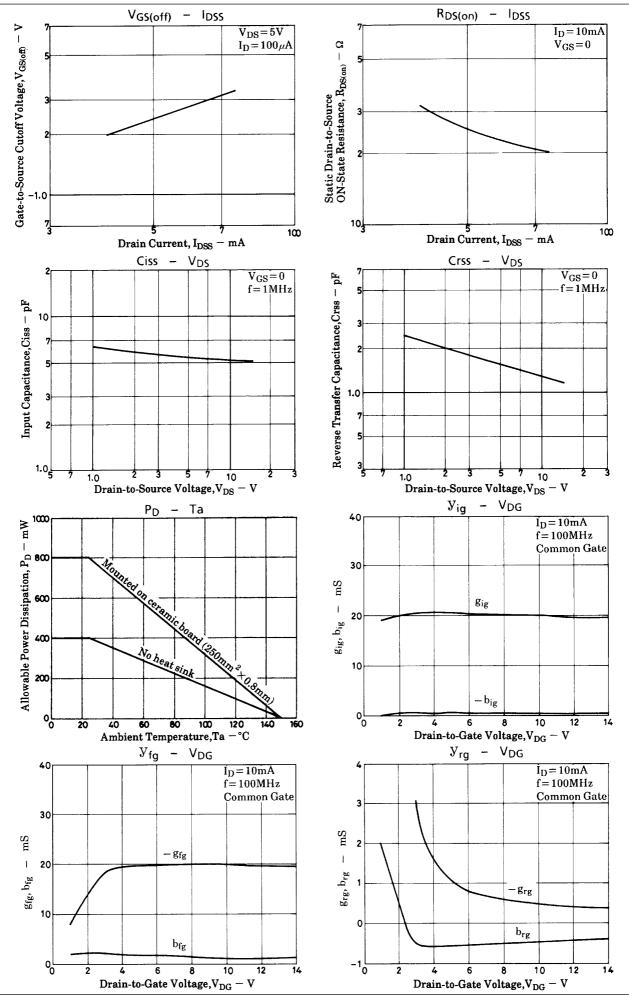


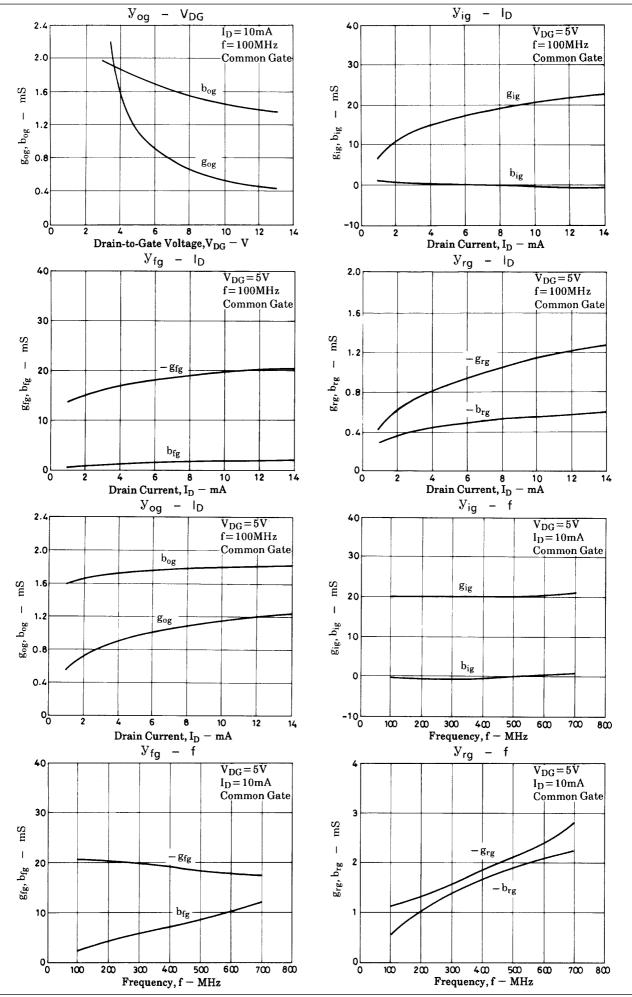




S parameter Frequency Characteristics

(Common gate) (V_{DG}=5V, I_D=10mA)



S parameter Frequency Characteristics

(Common gate) (V_{DG} =5V, I_D =10mA)



S parameter (Common gate)

 $V_{DG}\!\!=\!\!5V\!,\,I_D\!\!=\!\!10mA,\,Z_O\!\!=\!\!50\Omega$

Freq (MHz)	S ₁₁	∠S ₁₁	S ₂₁	∠S ₂₁	S ₁₂	∠S ₁₂	S ₂₂	∠ S ₂₂
100	0.024	54.7	0.985	-9.7	0.059	21.9	0.942	-9.0
200	0.038	48.5	0.963	-18.8	0.078	30.1	0.918	-17.3
300	0.054	32.4	0.932	-27.3	0.097	30.2	0.896	-25.4
400	0.055	20.5	0.903	-35.4	0.113	27.3	0.870	-33.0
500	0.060	1.8	0.875	-43.6	0.124	23.4	0.847	-40.5
600	0.055	-19.1	0.849	-51.4	0.132	19.0	0.826	-48.2
700	0.053	-41.6	0.826	-60.1	0.137	15.0	0.811	-56.0

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of August, 1999. Specifications and information herein are subject to change without notice.