August 2000

LM380 2.5W Audio Power Amplifier

General Description

The LM380 is a power audio amplifier for consumer applications. In order to hold system cost to a minimum, gain is internally fixed at 34 dB. A unique input stage allows ground referenced input signals. The output automatically self-centers to one-half the supply voltage.

The output is short circuit proof with internal thermal limiting. The package outline is standard dual-in-line. The LM380N uses a copper lead frame. The center three pins on either side comprise a heat sink. This makes the device easy to use in standard PC layouts.


Uses include simple phonograph amplifiers, intercoms, line drivers, teaching machine outputs, alarms, ultrasonic drivers, TV sound systems, AM-FM radio, small servo drivers, power converters, etc.

A selected part for more power on higher supply voltages is available as the LM384. For more information see AN-69.


Features

- Wide supply voltage range: 10V-22V
- Low quiescent power drain: 0.13W (V_S= 18V)
- Voltage gain fixed at 50
- High peak current capability: 1.3A
- Input referenced to GND
- High input impedance: 150kΩ
- Low distortion
- Quiescent output voltage is at one-half of the supply voltage
- Standard dual-in-line package

Connection Diagrams (Dual-In-Line Packages, Top View)

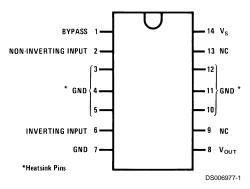


Order Number LM380N See NS Package Number N14A

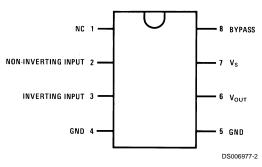

Order Number LM380N-8 See NS Package Number N08E


Block and Schematic Diagrams

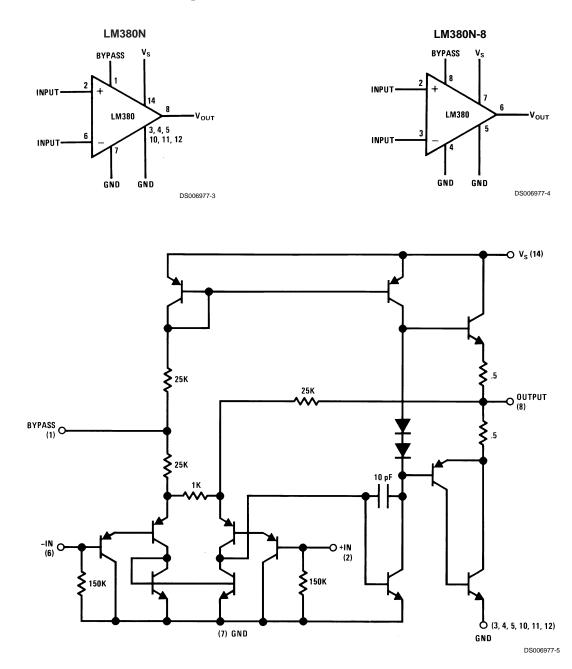

Absolute Maximum Ratings

LM380


Heat Sink Dimensions



Staver Heat Sink #V-7 Staver Company 41 Saxon Ave. P.O. Drawer H Bayshore, NY 11706 Tel: (516) 666-8000 Copper Wings 2 Required Soldered to Pins 3, 4, 5, 10, 11, 12 Thickness 0.04 Inches


Typical Performance Characteristics

Maximum Device Dissipation vs Ambient Temperature




Note: 2 oz. copper foil, single-sided PC board. DS006977-12


Device Dissipation vs Output Power—4 Ω Load




Device Dissipation vs Output Power — 8Ω Load



Device Dissipation vs Output Power — 16 Ω Load




www.national.com

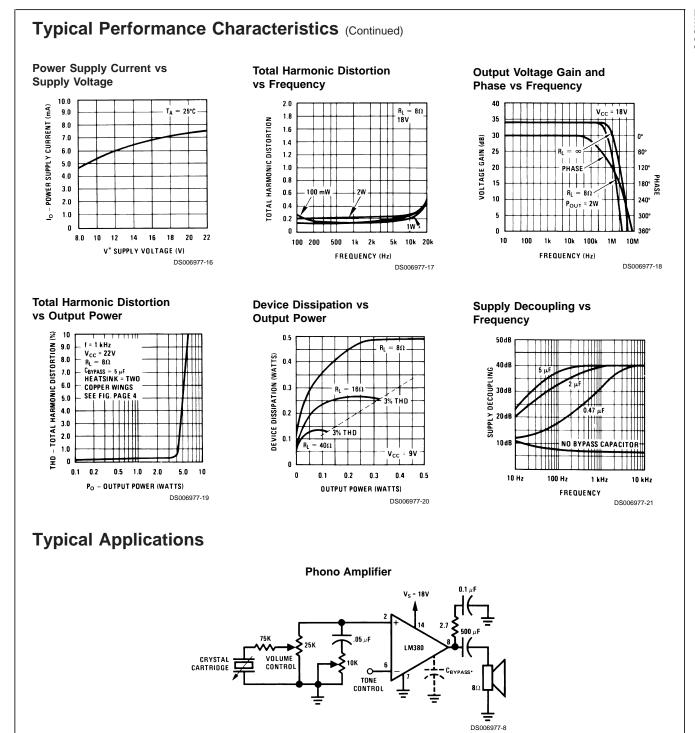


www.national.com

080 Тур


Typical Applications (Continued)

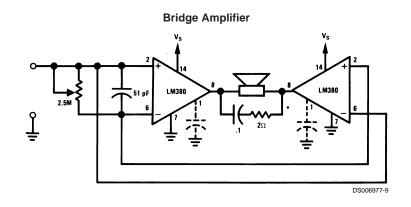




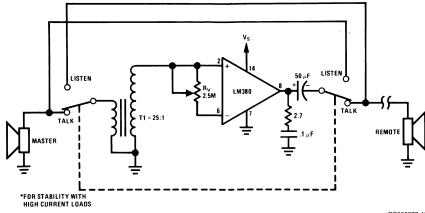

DS006977-10

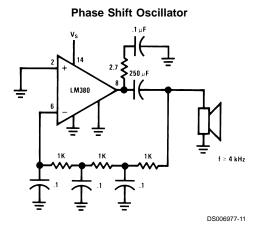

www.national.com

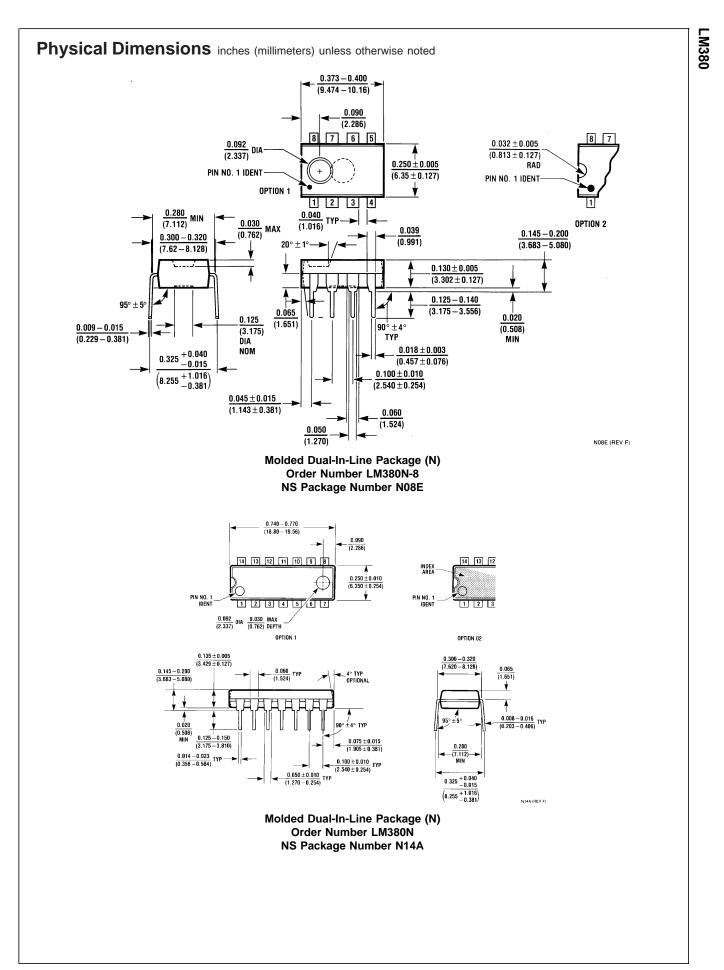

Notes

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

 Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor Corporation Americas Tel: 1-800-272-9959 Fax: 1-800-737-7018 Email: support@nsc.com www.national.com
 National Semiconductor

 Europe
 Fax: +49 (0) 180-530 85 86

 Email:
 europe.support@nsc.com

 Deutsch Tel: +49 (0) 69 9508 6208
 English

 Tel: +44 (0) 870 24 0 2171
 Français Tel: +33 (0) 1 41 91 8790

National Semiconductor Asia Pacific Customer Response Group Tel: 65-2544466 Fax: 65-2504466 Email: ap.support@nsc.com National Semiconductor Japan Ltd. Tel: 81-3-5639-7560 Fax: 81-3-5639-7507

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.