

SB0030-01A

Schottky Barrier Diode

10V, 30mA Detection Applications


Features

- · Glass sleeve structure.
- · Detection efficiency: 70%.
- · Small size (Half the size of the DO-35 heretofore in use).

Package Dimensions

unit:mm

1153A



Specifications


Absolute Maximum Ratings at Ta = 25°C

| Parameter | Symbol | Conditions | Ratings | Unit |
|---------------------------|----------------|------------|-------------|------|
| Reverse Voltage | ٧ _R | | 10 | V |
| Average Rectified Current | Io | | 30 | mA |
| Junction Temperature | Tj | | 100 | °C |
| Storage Temperature | Tstg | | -55 to +100 | °C |


Electrical Characteristics at Ta = 25°C

| Parameter | Symbol | Conditions | Ratings | | | Unit |
|----------------------|----------------|----------------------------|---------|-----|-----|-------|
| | | | min | typ | max | Offic |
| Forward Current | ΙF | V _F =1.0V | 4.5 | | | mA |
| Reverse Current | I _R | V _R =6V | | | 70 | μA |
| Capacitance | С | V _R =1V, f=1MHz | | | 1.5 | pF |
| Detection Efficiency | η | f=40MHz | 70 | | | % |

Detection Efficiency Circuit



Unit (resistance : Ω , capacitance : F)

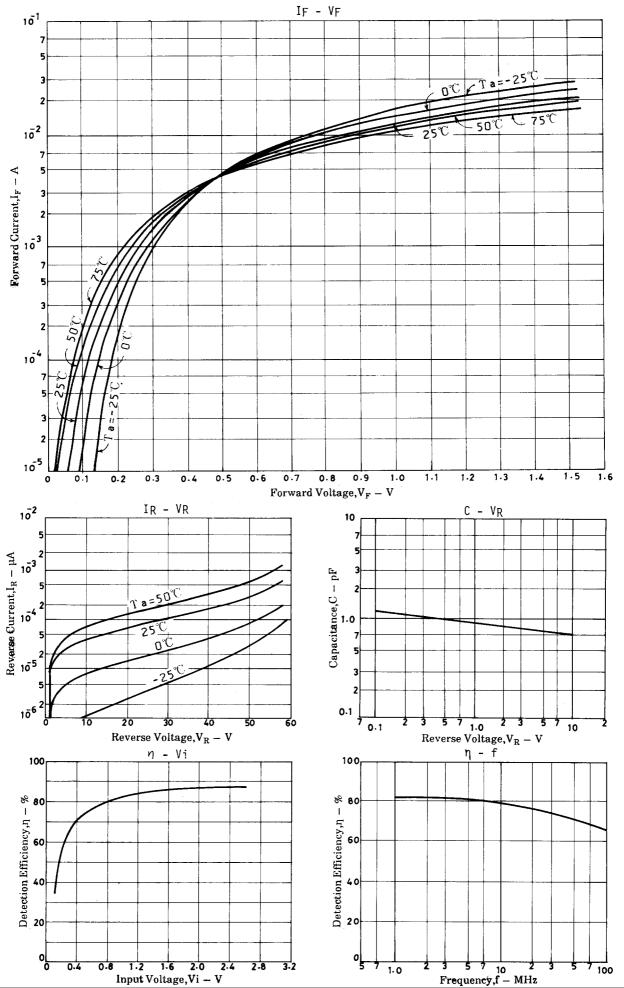

SB0030-01A

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibilty for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of June, 1998. Specifications and information herein are subject to change without notice.