Audio level sensor BA335

The BA335 is a sensor amplifier which consists of three blocks: a small signal audio amplifier, a hysteresis comparator, and a driver. Housed in a 9-pin SIP package, it is optimal for tape recorder end detection and tape mute detection.

Applications

Tape end detection

Tape mute detection

Features


- 1) Built-in comparator with stable hysteresis under power supply voltage and temperature fluctuations.
- Built-in transistor and diode capable of driving an inductive load at 600mA.
- 3) Time delays can be created as needed with an external CR circuit.

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	Vcc	15	V
Power dissipation	Pd	500*	mW
Operating temperature	Topr	−20~+75	င
Storage temperature	Tstg	−50~ +125	Ĉ
Maximum transistor collector current	I _{F Max} .	750	mA
Maximum diode forward current	Ic Max.	750	mA

^{*} Reduced by 5.0mW for each increase in Ta of 1°C over 25°C.

Internal circuit schematic

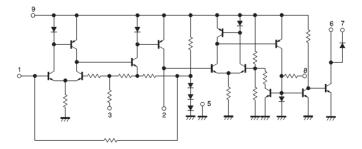


Audio ICs

●Electrical characteristics (unless otherwise noted, Ta = 25°C and Vcc = 9.0V)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Quiescent current	lα	_	6	13	mA	_
Output transistor leak current	IL1	_	_	100	μΑ	_
Output diode leak current	l _{L2}	_	_	100	μΑ	_
Output transistor saturation voltage	V _{CE(sat)}	_	1.5	2.0	V	Ic=600mA
Output diode forward voltage	VF	_	1.5	2.0	٧	I==600mA
Input discrimination off level	Vin	-54	-50	-43	dBm	f=1kHz
Comparator on level	V _{TH1}	3.0	3.5	4.0	V	_
Comparator off level	V _{TH2}	1.8	2.2	2.6	V	_
Pin 8 high level	V _{P8}	0.45	0.55	_	V	_

Measurement circuit

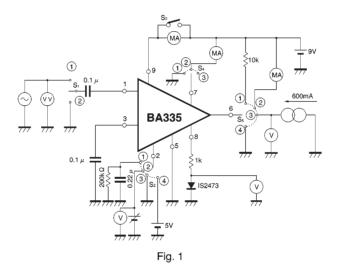

	S ₁	S ₂	S₃	S ₄	S ₅		
I _{CC1}	2	1	Open	3	1	Current test	
IL1	2	4	Short	2	2	Pin 7 current test	
l _{L2}	2	4	Short	2	2	Pin 6 current test	
$V_{\text{CE}(\text{sat})}$	2	3	Short	3	3	Pin 6 voltage test	
VF	2	4	Short	1	3	Pin 6 voltage test	
Vin	1	1	Short	3	1	V.V test when Pin 6 inverted	
V→H1	2	2	Short	3	1	Pin 2 voltage test when Pin 6 inverted	
V→H2	2	2	Short	3	1	Pin 2 voltage test when Pin 6 inverted	
V _{P8}	2	4	Short	3	1	Pin 8 voltage test	

Audio ICs BA335





Fig. 2 lc duty cycle characteristics

Attached components

 C_1 : Input coupling capacitor. 1 to $2.2\mu F$ recommended. C_2 : AC bypass capacitor. 0.1 to $0.47\mu F$ recommended. $R_1,~C_3$: Resistor and capacitor for setting time delay.

R₂, C₄: Resistor and capacitor for ripple filter.

Input characteristics



As shown in Fig. 4, V_{P6} and V_{P8} invert when the input reaches approximately -45 dBm. V_{P8} is designed to be able to directly drive the NPN small signal transistor at this time. When on, V_{P6} is capable of accepting a maximum of 600mA of current (this will vary as shown in the duty cycle table). A continuous ON should last for no more than 3 seconds.


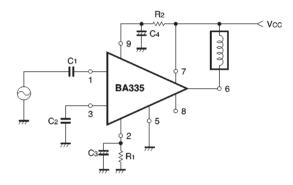



Fig. 3



Time delay using the hysteresis comparator is as follows. When an input signal of $-45 \mathrm{dBm}$ or more goes to nothing ceases, the electrical potential of Pin 2 begins to fall due to the CR circuit connected to Pin 2. The time until the hysteresis comparator inverts is the time delay. When deciding the values of the capacitor and resistor, select a resistor value from 100 to $500 \mathrm{k}\Omega$.

Audio ICs BA335

Electrical characteristic curves






Fig.6 Output transistor saturation voltage vs. collector current

Fig. 7 Output diode forward voltage vs. input voltage

Fig. 8 Quiescent current and input voltage vs. power supply voltage




Fig. 9 Input voltage vs. frequency

External dimensions (Units: mm)

