6V / 430mW single-channel power amplifier BA526

The BA526 is a high-output monolithic power amplifier with excellent audio quality. With a 6V power supply, it has a rated output of 430mW into an 8Ω load (THD = 10%), and a maximum output of 700mW. It comes in a compact 9-pin SIP package.

Applications


Portable radios, TV sets, cassette recorders, interphones, and wireless tranceivers

Features

- 1) High output. Pout = 430mW (Vcc = 6V and an 8Ω load (THD = 10%).
- Good low voltage characteristics. Begins operating at 2V.
- 3) Easy-to-mount 9-pin SIP package.


- 4) Extremely low high-frequency distortion with small signals. Uses soft clipping for good audio quality.
- 5) Power-on "pop" noise is suppressed.
- 6) Low noise.

Block diagram

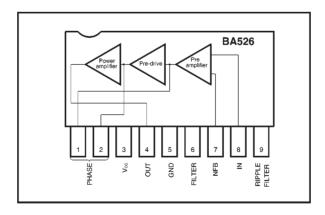

Audio ICs BA526

Internal circuit configuration

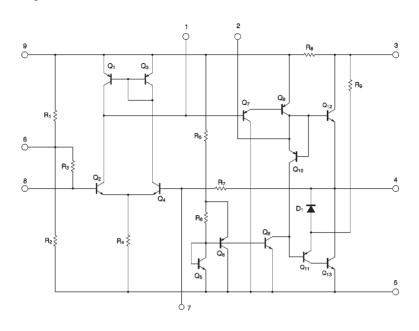

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	Vcc	9	V
Power dissipation	Pd	950*	mW
Operating temperature	Topr	−10~ +65	°
Storage temperature	Tstg	-30 ∼+125	°C

^{*} Reduced by 9.5mW for each increase in Ta of 1°C over 25°C.

•Electrical characteristics (unless otherwise noted, Ta = 25 $^{\circ}$ C, Vcc = 6V, RL= 8 Ω and f= 1kHz)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	Measurement circuit
Quiescent current	lα	_	12	24	mA	V _{IN} =0V _{rms}	Fig.1
Closed loop voltage gain	Gvc	48	52	54	dB	R_{NF} =47 Ω V_{IN} =2.5 m V_{rms}	Fig.1
Maximum output power	Ром	600	700	_	mW	V _{IN} =25mV _{rms}	Fig.1
Rated output power	Роит	350	430	_	mW	THD=10%	Fig.1
Output noise voltage	V _{NO}	_	0.25	0.7	mV _{rms}	$R_g=0\Omega$	Fig.1
Total harmonic distortion	THD	_	0.4	2	%	Po=50mW	Fig.1
Input resistance	R _{IN}	_	22	_	kΩ	Po=50mW	Fig.1

Audio ICs

Measurement circuit

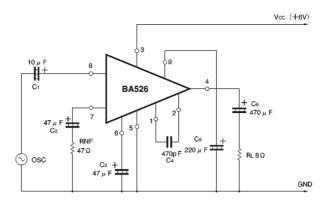


Fig. 1

Application example

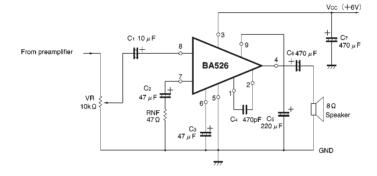


Fig. 2

●External dimensions (Units: mm)

