



SPD Series

Package Type GaAs Schottky Barrier Diode
C to Ku Band Mixer,
Detector, Modulator Applications

Features

- Very small-sized ceramic package.
- Less parasitic components, conversion loss.
- Many types : 5 single types, 10 integrated types.

Applications

- SPD-121 : C to X band use, DBS measuring instruments.
- SPD-121M : C to X band use, TVRO, DBS.
- SPD-221 : X to Ku band use, communications equipment.
- SPD-121P, 122P : C to X band use, mixer, modulator.

Specifications

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	SPD-121	121M	221	121P	122P	Unit
Reverse Voltage	V_R		→	→	→	→	4	V
Peak Reverse Voltage	V_{RM}		→	→	→	→	4.5	V
Average Rectified Current	I_O		→	→	→	→	50	mA
Peak Forward Current	I_{FM}		→	→	→	→	150	mA
Storage Temperature	Tstg		→	→	→	→	-65 to +150	°C
Junction Temperature	Tj		→	→	→	→	150	°C
Mounting Condition	Tm	10 s	→	→	→	→	230	°C


Electrical Characteristics at Ta = 25°C

Parameter	Symbol	Conditions	SPD-121	121M	221	121P	122P	Unit
Reverse Voltage	V_R	$I_R=10\mu A$	→	→	→	→	-4	V min
Forward Voltage	V_F	$I_F=20mA$	0.9	0.9	1.0	0.9	0.9	V max
Total Capacitance	C_t	$V=0V, f=1MHz$	0.3	0.35	0.25	0.4	0.4	pF max
Series Resistance	R_s	$I_F=20mA$	1.5	1.5	2.5	1.5	1.5	Ω
Conversion Loss	L_C	$f=10.678GHz, P_{LO}=10mW$	3.7	3.8	3.6	4.0	4.0	dB

Package Dimensions


unit:mm

1218

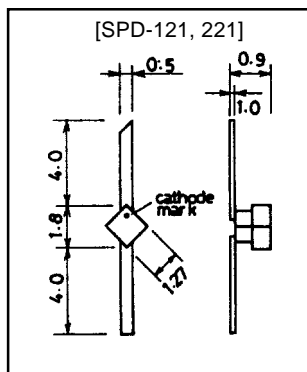


unit:mm

1219

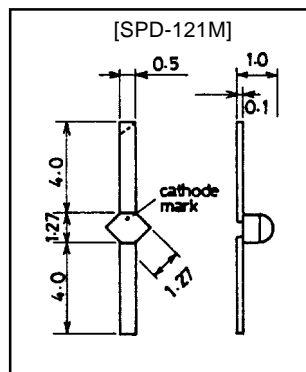


unit:mm

1221



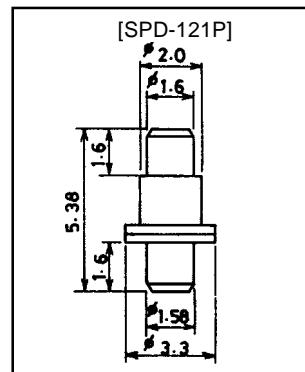


unit:mm

1220

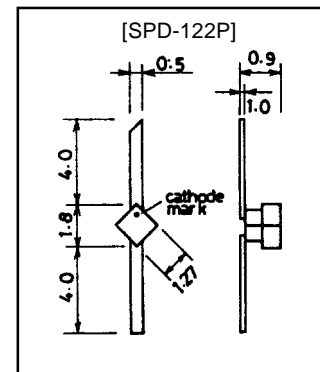

SPD Series

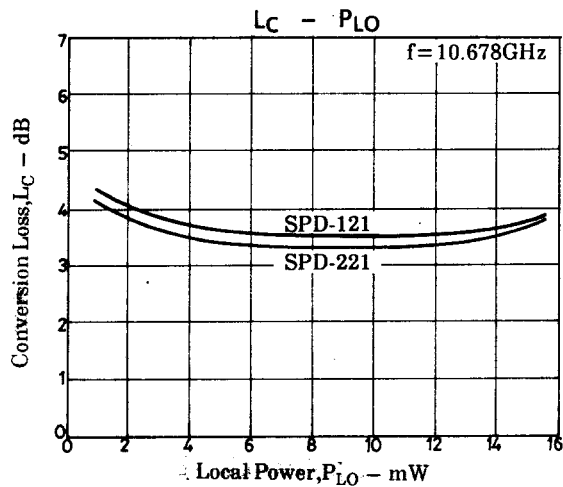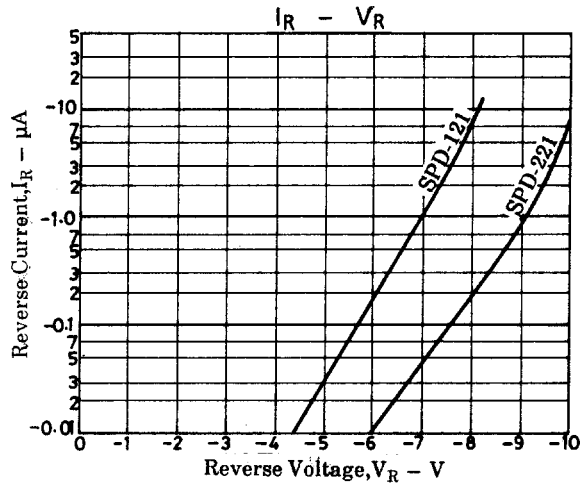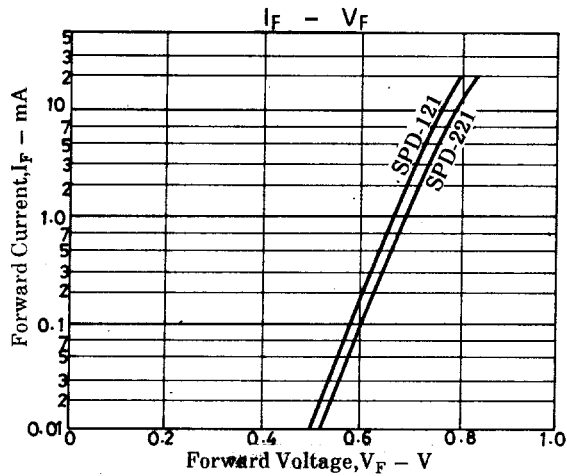


Electrical Connection



Note: In addition to the single types shown above, the integrated types shown below are available. For details, contact our sales offices.

Electrical Connection

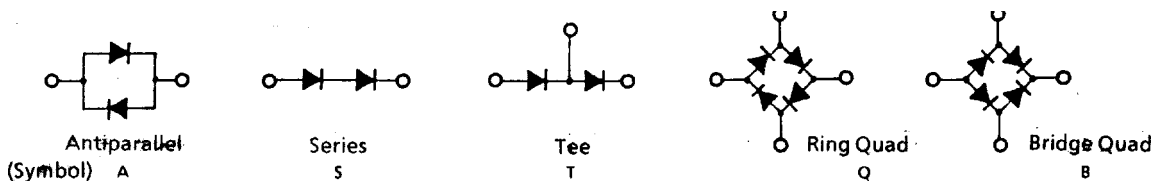

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of July, 1998. Specifications and information herein are subject to change without notice.