





**Dimensions:** dimensions are in mm

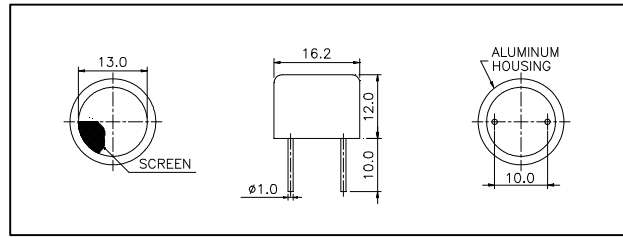

**Impedance/Phase Angle vs. Frequency**

Tested under 1Vrms Oscillation Level

- 400SR160 Impedance —
- 400SR160 Phase —
- 400ST160 Impedance - - - - -
- 400ST160 Phase - - - - -

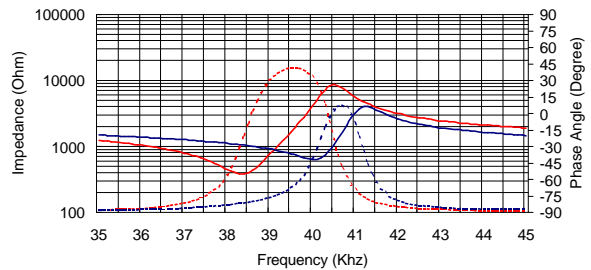

**Specification**

<b>400ST160</b>	Transmitter
<b>400SR160</b>	Receiver
<b>Center Frequency</b>	40.0±1.0Khz
<b>Bandwidth (-6dB)</b>	400ST160 2.0Khz 400SR160 2.5Khz
<b>Transmitting Sound Pressure Level</b>	120dB min.
at 40.0Khz; 0dB re 0.0002μbar per 10Vrms at 30cm	
<b>Receiving Sensitivity</b>	-65dB min.
at 40.0Khz 0dB = 1 volt/μbar	
<b>Capacitance at 1Khz</b>	±20% 2400 pF
<b>Max. Driving Voltage (cont.)</b>	20Vrms
<b>Total Beam Angle</b>	-6dB 55° typical
<b>Operation Temperature</b>	-40 to 85°C
<b>Storage Temperature</b>	-40 to 85°C


All specification taken typical at 25°C  
Closer frequency tolerance can be supplied upon request.

Models available:


1	400ST/R160	Aluminum Housing
2	400ST/R16B	Black Al. Housing
2	400ST/R10P	Plastic Housing
3	400ST/R16F	Al. Housing w/Solid Grid

**Sensitivity/Sound Pressure Level**

Tested under 10Vrms @30cm

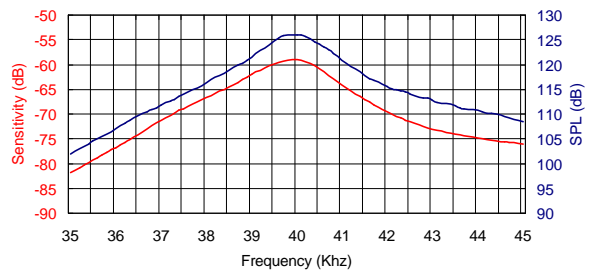


**Beam Angle:** Tested at 40.0Khz frequency

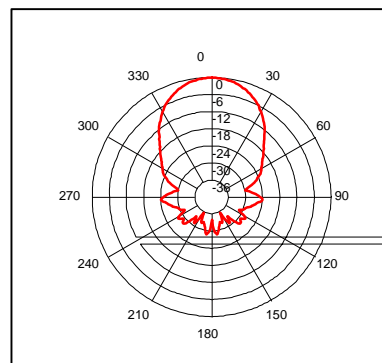


**400SR160 Receiver**

**400ST160 Transmitter**


**Sensitivity Variation vs. Loaded Resistor**

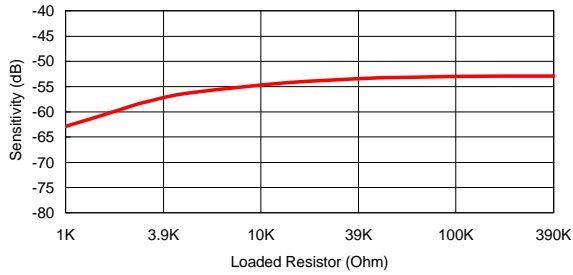


**SPL Variation vs. Driving Voltage**

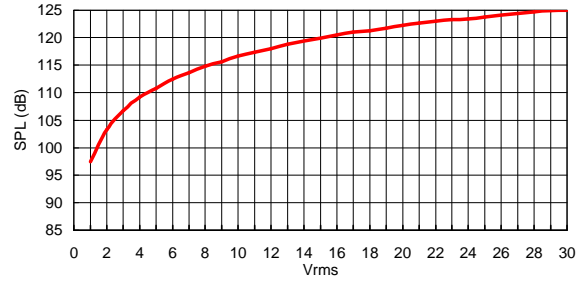


**Center Frequency Shift vs. Loaded Resistor**

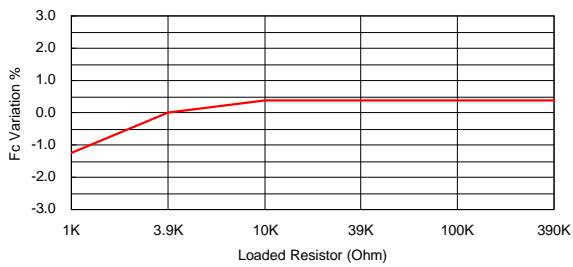


**Center Frequency Shift vs. Driving Voltage**

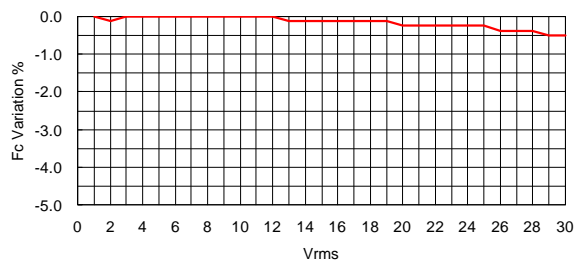


**Sensitivity Variation vs. Temperature**

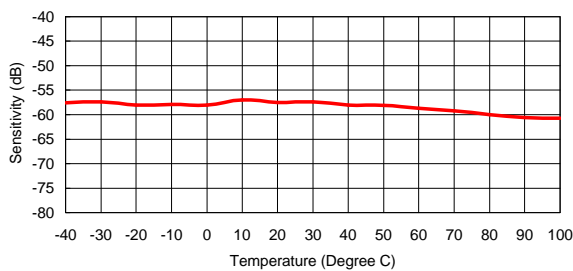

**SPL Variation vs. Temperature**

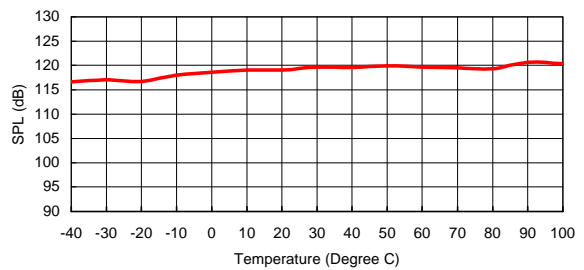

**Center Frequency Shift vs. Temperature**

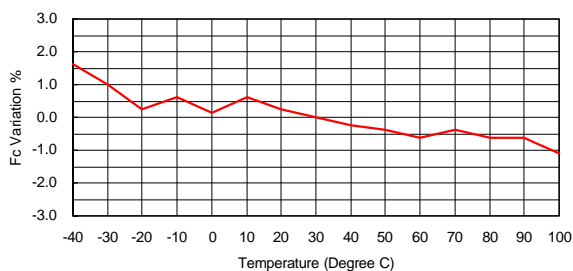

**Center Frequency Shift vs. Temperature**

