
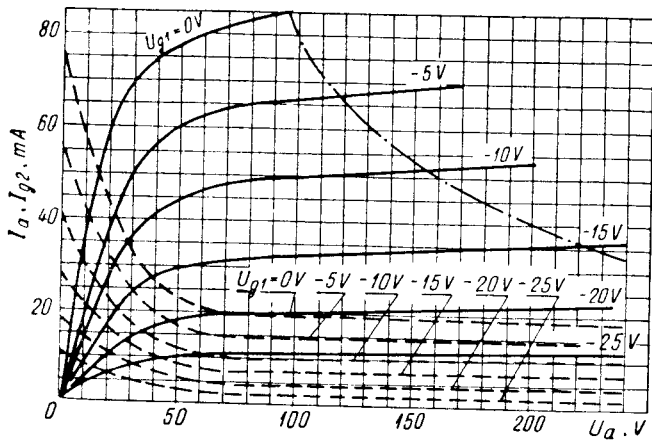
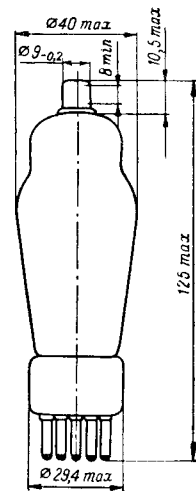


Выходной пентод
Output pentode

10П12С


Выходной пентод 10П12С предназначен для

The 10П12С output pentode is designed for
low frequency power amplification in long-dist.

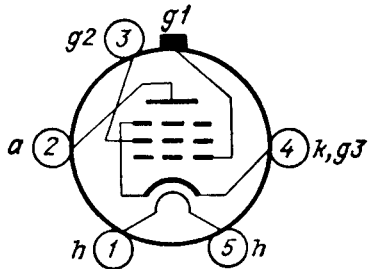

$$I_a, I_{g2} = f(U_a)$$

————— I_a $I_h = 850 \text{ mA}$
 - - - - - I_{g2} $U_{g2} = 135 \text{ V}$
 - · - · - $P_{a \text{ max}}$

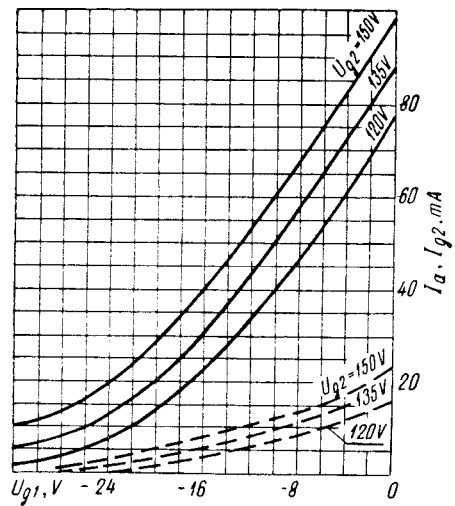

$$I_a, I_{g2} = f(U_{g1})$$

————— I_a $I_h = 850 \text{ mA}$
 - - - - - I_{g2} $U_a = 135 \text{ V}$