




1W DC-DC CONVERTER

| Туре | Vi | Vo | Io |
|---------|-----|-----|--------|
| GS1T5-5 | 5 V | 5 V | 250 mA |

DESCRIPTION

The GS1T5-5 is a 1W DC-DC converter designed to provide an isolated 5V/250mA power source.

The module operates from a 5V input source and it offers 2500VDC isolation.

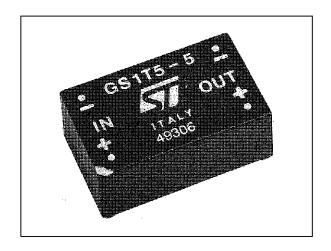


ELECTRICAL CHARACTERISTICS (T_{amb.}= 25° C unless otherwise specified)

| Symbol | Parameter | Test Conditions | | Min | Тур | Max | Unit |
|------------------|--|--------------------------------------|-------------------------------------|------|-----|------|------|
| Vi | Input Voltage | V ₀ = 5V | Io = 0 to 250mA | 4.50 | 5 | 5.50 | V |
| lir | Input Reflected Current | Vi = 5V Vo = 5V | I _O = 0 to 250mA | | 15 | 30 | mApp |
| Vo | Output Voltage | $V_i = 4.5 \text{ to } 5.5 \text{V}$ | $I_0 = 0$ to 250mA | 4.75 | 5 | 5.25 | V |
| lo | Output Current* | V _i = 4.5 to 5.5V | $V_0 = 5V$ | 0 | | 250 | mA |
| δVol | Line Regulation | $V_i = 4.5 \text{ to } 5.5 \text{V}$ | $I_0 = 250 \text{mA}$ | | | 5 | mV |
| δVοο | Load Regulation | Vi = 5V | $I_0 = 20 \text{ to } 250\text{mA}$ | | | 5 | mV |
| Vor | Output Ripple Voltage | Vi = 5V V _O = 5V | I _O = 40 to 250mA | | 60 | 80 | mVpp |
| Vis | Isolation Voltage | Input to Output | | 2500 | | | VDC |
| η | Efficiency | Vi = 5V Vo = 5V | I _O = 250mA | 70 | 73 | | % |
| Top | Operating Ambient Temperature Range | | | - 25 | | +75 | °C |
| T _{stg} | Storage Temperature Range | | | - 40 | | +85 | °C |

^{*} Note: when output current is less than 20mA, output ripple voltage increases due to discontinuous operation.

June 1994 1/2

CONNECTION DIAGRAM AND MECHANICAL DATA

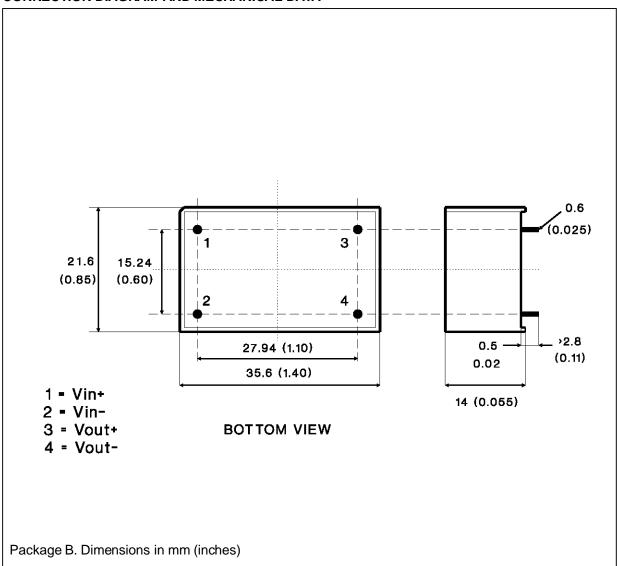

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specification mentioned in this publication are subject to change without notice. This publication superseds and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

