
Flat displays LD-001 Series

The LD-001 series were designed in response to the need for medium-sized, flat displays. These are two-chip, flat displays with high luminance.

Features

- 1) 4.5×9.5 mm planar emission from two chips connected in series.
- 2) High luminance, uniform emission.
- 3) Four colors: red, orange, yellow and green.

External dimensions (Units: mm)

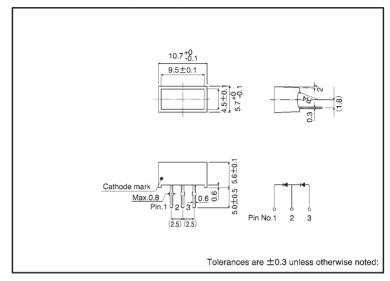

Selection guide

| Emitting color | Red | Orange | Yellow | Green | |
|----------------|----------|----------|----------|----------|--|
| Type | LD-001VR | LD-001DU | LD-001YY | LD-001MG | |

●Absolute maximum ratings (Ta = 25°C)

| Parameter | Symbol | Red | LD-001VR | Orange | LD-001DU | Yellow | LD-001YY | Green | LD-001MG | Unit |
|-----------------------|--------|-----|-----------------|--------|----------|--------|----------|-------|----------|------|
| Power dissipation | P□ | 120 | | 120 | | | 120 | 150 | | mW |
| Forward current | lF | 20 | | 20 | | | 20 | | mA | |
| Peak forward current | IFP | 60* | | 60* | | 60* | | 60* | | mA |
| Reverse voltage | VR | 3 | | 3 | | 3 | | 3 | | V |
| Operating temperature | Topr | | −25∼+75 | | | | | | | Ĉ |
| Storage temperature | Tstg | | −30~ +85 | | | | | | Ĉ | |

^{*} Pulse width 1ms duty 1 / 5


LED displays LD-001 Series

●Electrical and optical characteristics (Ta = 25°C)

| Parameter Symbol | Cumbal | Canditions | Red | | Orange | | Yellow | | | Green | | | Unit | | |
|--------------------------|------------|--------------------|------|------|--------|------|--------|------|------|-------|------|------|------|-------|----|
| | Conditions | Min. | Тур. | Max. | Min. | Тур. | Max. | Min. | Тур. | Max. | Min. | Тур. | Max. | Offil | |
| Forward voltage | VF | I=10mA | _ | 2.0 | 2.8 | _ | 2.0 | 2.8 | _ | 2.1 | 2.8 | _ | 2.1 | 2.8 | ٧ |
| Reverse current | lR | V _R =3V | _ | _ | 10 | _ | _ | 10 | _ | _ | 10 | _ | _ | 10 | μА |
| Peak wavelength | λp | I=10mA | _ | 650 | _ | _ | 610 | _ | _ | 585 | _ | _ | 563 | _ | nm |
| Spectral line half width | Δλ | I=10mA | _ | 40 | _ | _ | 40 | _ | _ | 40 | _ | _ | 40 | _ | nm |

Electrical and optical values are guaranteed values per segment.

Luminous intensity vs. wavelength

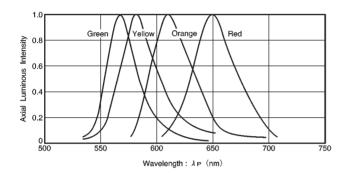

Luminous intensity

| Color | Туре | Min. | Тур. | Max. | Unit | |
|--------|----------|------|------|------|------|--|
| Red | LD-001VR | 2.2 | 6.3 | _ | mcd | |
| Orange | LD-001DU | 2.2 | 6.3 | _ | mcd | |
| Yellow | LD-001YY | 1.4 | 4.0 | _ | mcd | |
| Green | LD-001MG | 3.6 | 10 | _ | mcd | |

Note 1: Measured at IF = 10mA

Note 2: Current passes through 2 elements in series.

Operation notes

When forming leads, the bend should be at least 2 mm from the base of the package. Solder after forming the leads, and ensure that the inside of the LED is not subjected to mechanical stress while it is hot.