





# M27C516

## LCC Pin Connections

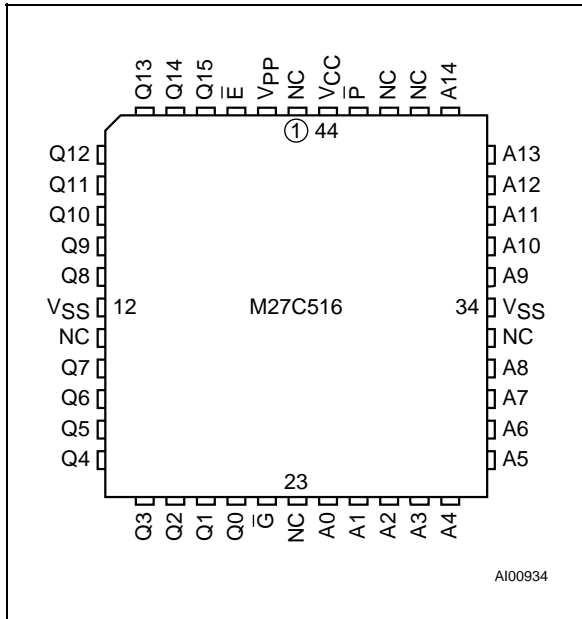

**Warning:** NC = Not Connected.

## TSOP Pin Connections

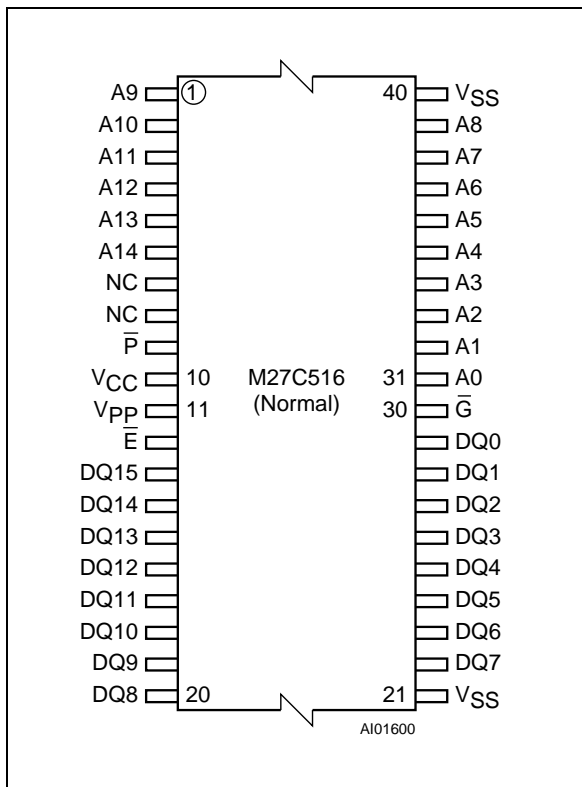

**Warning:** NC = Not Connected.

## Ordering Information Scheme

For a list of available options or for further information on any aspect of this device, please contact the STMicroelectronics Sales Office nearest to you.

Example: M27C516 -70 X N 1 TR

<b>Speed</b>	
-35 <sup>(1)</sup> 35ns	
-45 <sup>(1)</sup> 45ns	
-55 <sup>(2)</sup> 55ns	
-70 <sup>(2)</sup> 70ns	
-85 85ns	
-10 100ns	
<b>V<sub>CC</sub> Tolerance</b>	
blank ± 10V	
X ± 5V	
<b>Package</b>	
C PLCC44	
N TSOP40 10 x 14mm	
<b>Temp. Range</b>	
1 0 to 70 °C	
6 -40 to 85 °C	
<b>Option</b>	
TR Tape & Reel Packing	

**Notes:** 1. High Speed load. See full data sheet for further information.  
2. Speed obtained with a load capacitance of 60pF.