

# Schottky barrier diode

## RB706F-40 / RB706D-40

### ●Applications

General purpose detection  
High speed switching


### ●Features

- 1) Compact dual element linear type. (SMD3 / UMD3)
- 2) High reliability.
- 3) Low reverse current and low forward voltage.

### ●Construction

Silicon epitaxial planar

### ●External dimensions (Units: mm)

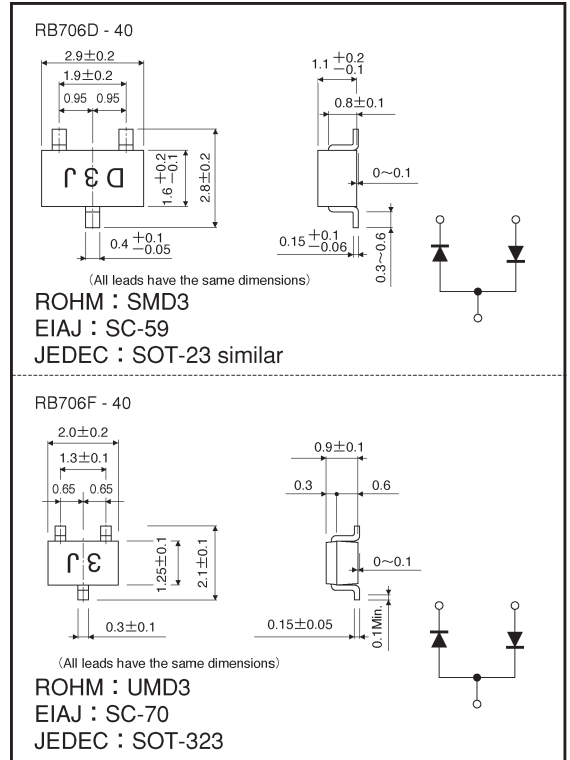

### ●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Peak reverse voltage	$V_{RM}$	45	V
DC reverse voltage	$V_R$	40	V
Mean rectifying current	$I_o$	30	mA
Peak forward surge current *	$I_{FSM}$	200	mA
Junction temperature	$T_j$	125	°C
Storage temperature	$T_{stg}$	-40~+125	°C

\* 60 Hz for 1 ms

●Electrical characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	$V_F$	—	0.26	0.37	V	$I_F=1\text{mA}$
Reverse current	$I_R$	—	0.05	1	$\mu\text{A}$	$V_R=10\text{V}$
Capacitance between terminals	$C_T$	—	2.0	—	pF	$V_R=1\text{V}$ , $f=1\text{MHz}$

\* ESD sensitive product handling required.

●Electrical characteristics curves (Ta = 25°C unless specified otherwise)

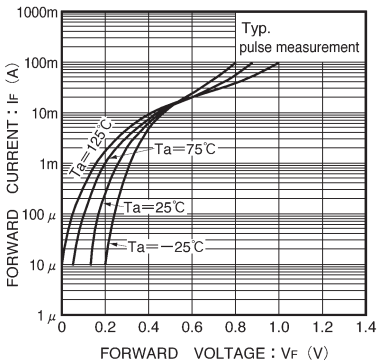


Fig. 1 Forward characteristics

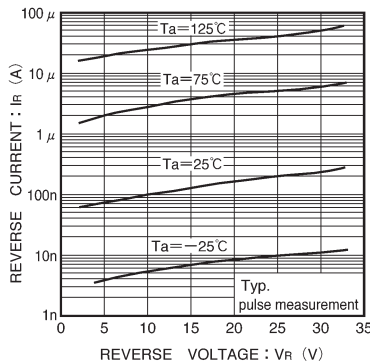


Fig. 2 Reverse characteristics

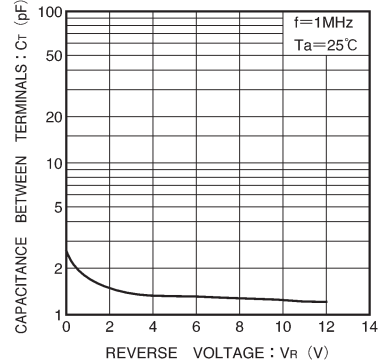


Fig. 3 Capacitance between terminals characteristics

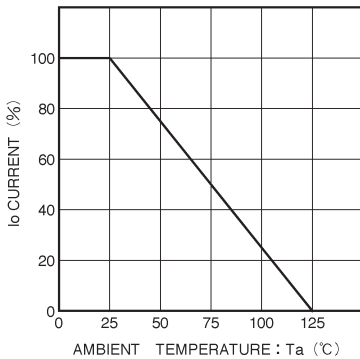


Fig. 4. Derating curve (mounting on glass epoxy PCBs)