

Reflecting low-dome LEDs, directly mountable ($\phi 5.0$ mm)

SLR-505 Series

The SLR-505 series are small 5 mm LEDs with a lead pitch of 5 mm which can be directly mounted on a printed circuit board. Two colors and two lens types are available for a total of four types, and they are suitable for use in a wide variety of applications.

●Features


- 1) Can be directly mounted on a printed circuit board.
- 2) Available on tape to allow mounting using a 5 mm pitch machine without lead forming.
- 3) Large flange eliminates wobbling after mounting (stable before and after soldering).
- 4) The auto insertability and stability of this LED dramatically decreases quality problems during production.

●Selection guide

Lens \ Emitting color	Red	Green
	Colored diffused	SLR-505VR
Colored clear	SLR-505VC	SLR-505MC

Note: This product is only available on tape.

●External dimensions (Units: mm)

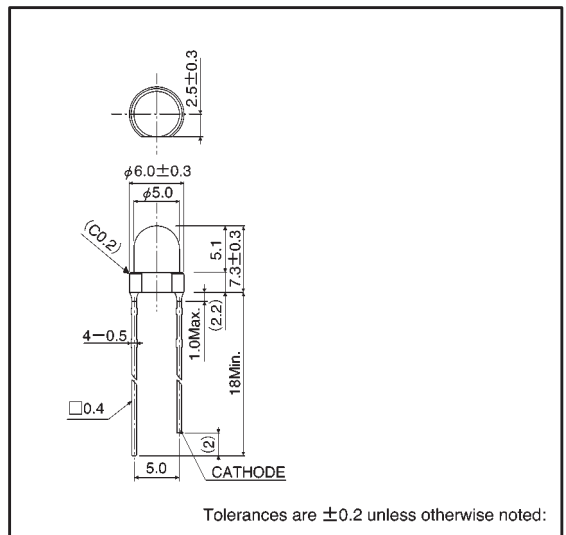

●Absolute maximum ratings (Ta = 25 °C)

Parameter	Symbol	Red	Green	Unit
		SLR-505VR SLR-505VC	SLR-505MG SLR-505MC	
Power dissipation	P _D	60	75	mW
Forward current	I _F	20	25	mA
Peak forward current	I _{FP}	60*	60*	mA
Reverse voltage	V _R	3	3	V
Operating temperature	T _{opr}	-25~+85		°C
Storage temperature	T _{stg}	-30~+100		°C
Soldering temperature	—	260°C 5 seconds maximum		—

* Pulse width 1ms Duty 1 / 5

●Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Conditions	Red			Green			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V_F	$I_F=10\text{mA}$	—	2.0	3.0	—	2.1	3.0	V
Reverse current	I_R	$V_R=3\text{V}$	—	—	10	—	—	10	μA
Peak wavelength	λ_P	$I_F=10\text{mA}$	—	650	—	—	563	—	nm
Spectral line half width	$\Delta\lambda$	$I_F=10\text{mA}$	—	40	—	—	40	—	nm
Viewing angle	$2\theta_{1/2}$	Diffused	—	55	—	—	55	—	deg
		Transparent	—	35	—	—	35	—	

●Luminous intensity vs. wavelength

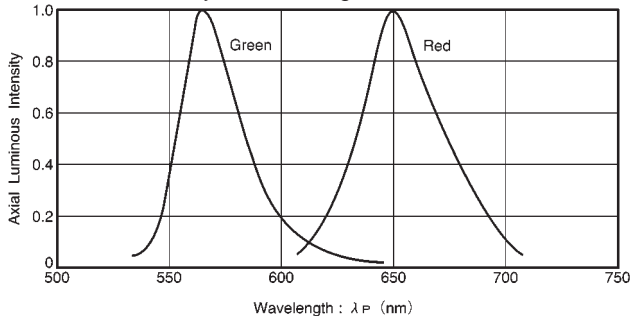


Fig. 1

●Luminous intensity

Color	λ_P	Type	Min.	Typ.	Max.	Unit
Red	650	SLR-505VR	2.2	6.3	—	mcd
		SLR-505VC	5.6	16.0	—	mcd
Green	563	SLR-505MG	5.6	16.0	—	mcd
		SLR-505MC	9.0	25.0	—	mcd

Note: Measured at $I_F = 10\text{ mA}$

●Directional pattern

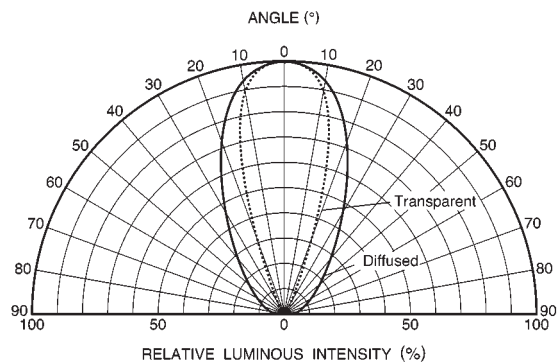


Fig. 2

● Electrical characteristic curves 1 (red)

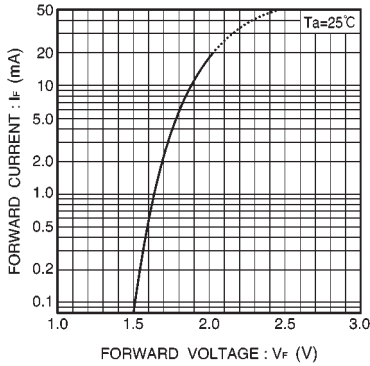


Fig. 3 Forward current vs. forward voltage

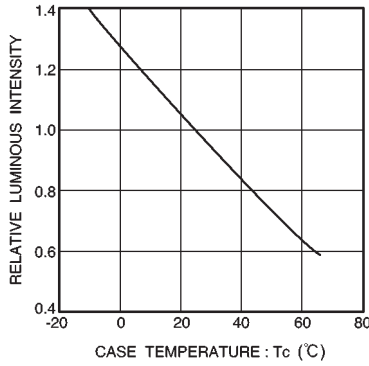


Fig. 4 Luminous intensity vs. case temperature

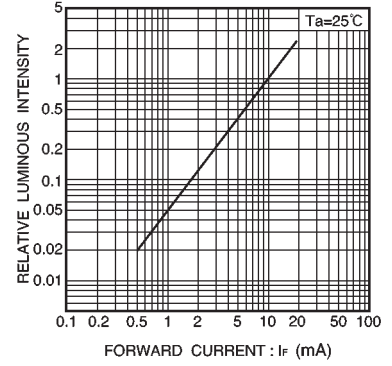


Fig. 5 Luminous intensity vs. forward current

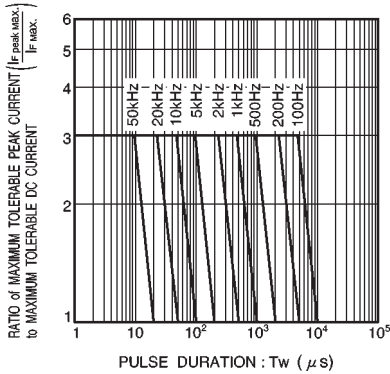


Fig. 6 Maximum tolerable peak current vs. pulse duration

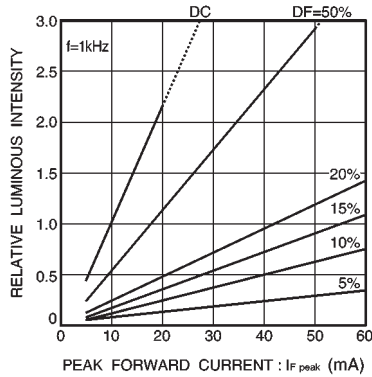


Fig. 7 Luminous intensity vs. peak forward current

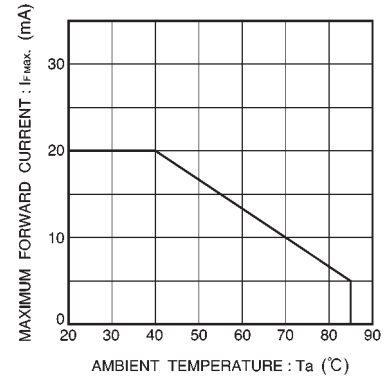


Fig. 8 Maximum forward current vs. ambient temperature

●Electrical characteristic curves 2 (green)

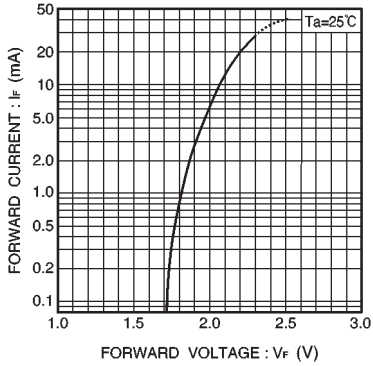


Fig. 9 Forward current vs. forward voltage

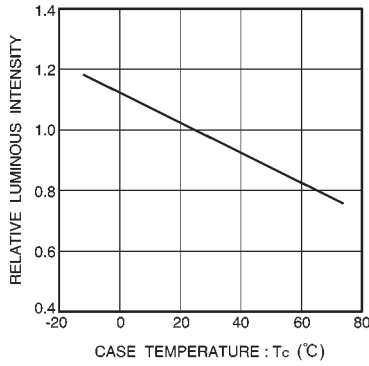


Fig. 10 Luminous intensity vs. case temperature

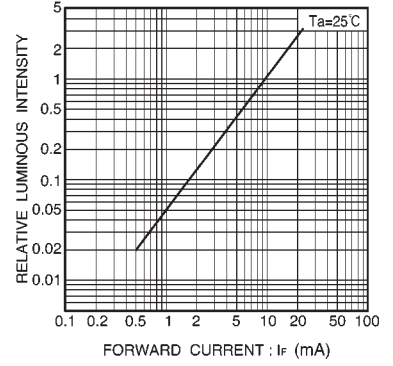


Fig. 11 Luminous intensity vs. forward current

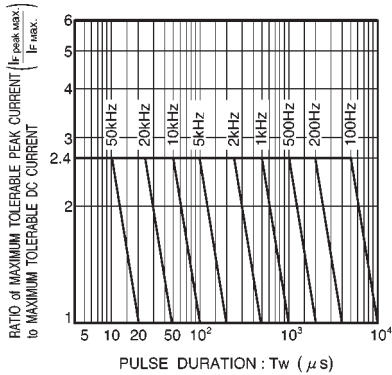


Fig. 12 Maximum tolerable peak current vs. pulse duration

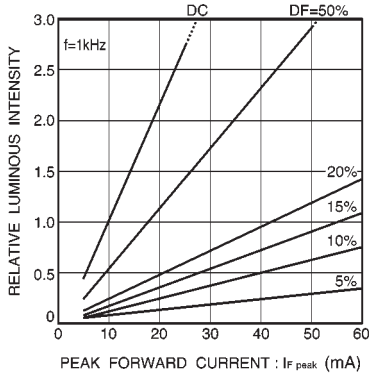


Fig. 13 Luminous intensity vs. peak forward current

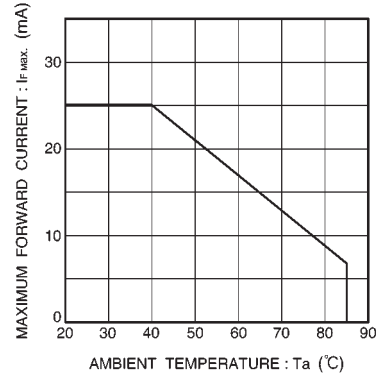


Fig. 14 Maximum forward current vs. ambient temperature