

Chip LEDs with reflectors


SML-010 Series

The SML-010 series are high luminance chip LEDs with reflectors. The compact and leadless design of these LEDs allows for high mounting density.

●Features

- 1) Reflectors are used to achieve a high luminance.
- 2) Four colors: red, orange, yellow and green.
- 3) Rectangular and leadless (3×2 mm).
- 4) Can be mounted by automatic mounting.

●External dimensions (Units: mm)

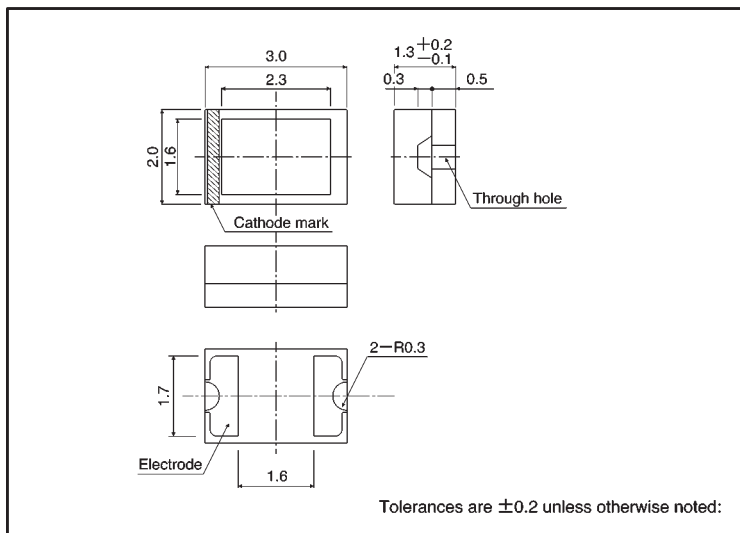

●Selection guide

| Emitting color Lens | Red | Orange | Yellow | Green |
|------------------------|-------------------|-----------|-----------|-----------|
| | Transparent clear | SML-010JT | SML-010DT | SML-010YT |
| | SML-010LT | — | — | SML-010FT |
| | SML-010VT | — | — | SML-010PT |

●Absolute maximum ratings (Ta = 25°C)

| Parameter | Symbol | Limits | | Unit |
|-----------------------|------------------|-------------------|--------------|------|
| | | Bright red (L, J) | Other colors | |
| Power dissipation | P _D | 75 | 70 | mW |
| Forward current | I _F | 30 | 25 | mA |
| Peak forward current | I _{FP} | 75 | 60 | mA* |
| Reverse voltage | V _R | 4 | | V |
| Operating temperature | T _{opr} | -30~+85 | | °C |
| Storage temperature | T _{stg} | -40~+85 | | °C |

* Pulse width 1ms Duty 1 / 5

●Electrical and optical characteristics (Ta = 25°C)

| Type | Parameter | Color | Forward voltage | | Reverse current | | Luminous intensity | | | Peak wavelength | | Spectral line half width | | |
|---------|-----------|--------|--------------------|------|---------------------|---------------------|--------------------|----------------------|------|---------------------|-------|--------------------------|-------|---------------------|
| | | | V _F (V) | | Cond. | I _R (μA) | Cond. | I _v (mcd) | | λ _P (nm) | Cond. | Δλ (nm) | Cond. | |
| | | | Typ. | Max. | I _F (mA) | Max. | V _R (V) | Min. | Typ. | I _F (mA) | Typ. | I _F (mA) | Typ. | I _F (mA) |
| SML-010 | JT | Red | 1.9 | 2.5 | 20 | 100 | 4 | 14.0 | 40.0 | 20 | 660 | 20 | 20 | 20 |
| | LT | Red | 1.75 | 2.5 | 20 | 100 | 4 | 5.6 | 16.0 | 20 | 660 | 20 | 25 | 20 |
| | VT | Red | 2.0 | 2.8 | 20 | 100 | 4 | 2.2 | 6.3 | 20 | 650 | 20 | 40 | 20 |
| | DT | Orange | 2.0 | 2.8 | 20 | 100 | 4 | 3.6 | 10.0 | 20 | 610 | 20 | 40 | 20 |
| | YT | Yellow | 2.1 | 2.8 | 20 | 100 | 4 | 2.2 | 6.3 | 20 | 585 | 20 | 40 | 20 |
| | MT | Green | 2.2 | 2.8 | 20 | 100 | 4 | 5.6 | 25.0 | 20 | 570 | 20 | 40 | 20 |
| | FT | Green | 2.2 | 2.8 | 20 | 100 | 4 | 3.6 | 10.0 | 20 | 560 | 20 | 40 | 20 |
| PT | Green | 2.2 | 2.8 | 20 | 100 | 4 | 2.2 | 6.3 | 20 | 555 | 20 | 40 | 20 | |

●Directional pattern

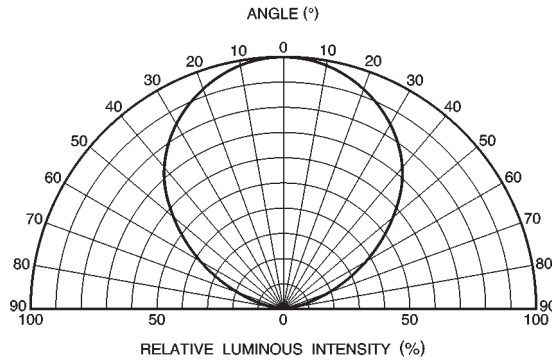


Fig. 1 Directional pattern

●Electrical characteristic curves 1 (SML-010LT, SML-010JT) (bright red)

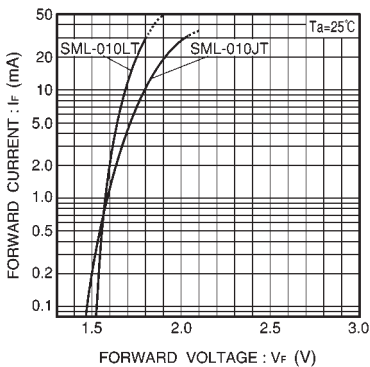


Fig. 2 Forward current vs. forward voltage

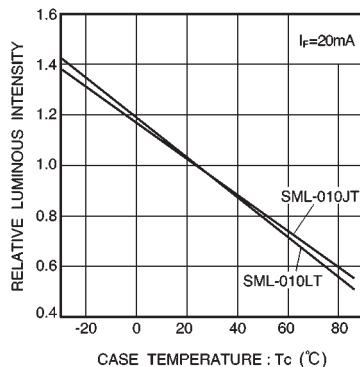


Fig. 3 Luminous intensity vs. case temperature

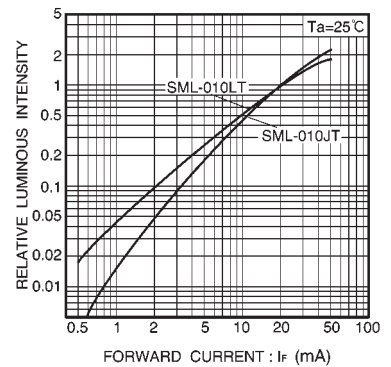


Fig. 4 Luminous intensity vs. forward current

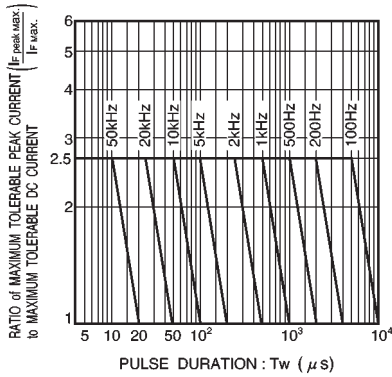


Fig. 5 Maximum tolerable peak current vs. pulse duration

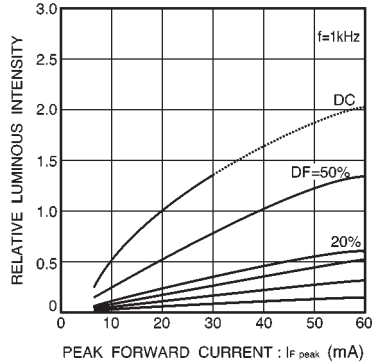


Fig. 6 Luminous intensity vs. peak forward current

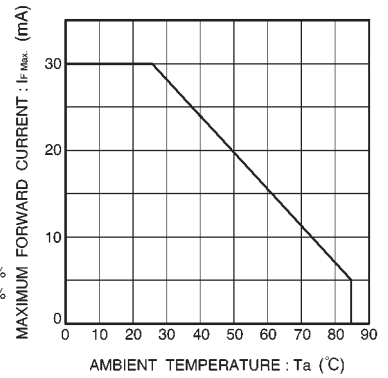


Fig. 7 Maximum forward current vs. ambient temperature

●Electrical characteristic curves 2 (SML-010VT) (red)

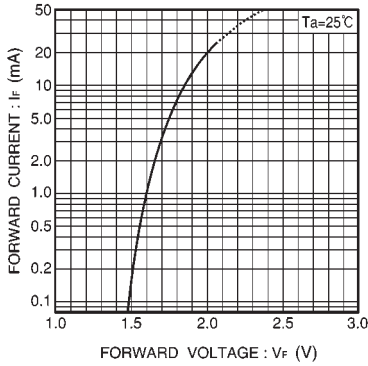


Fig. 8 Forward current vs. forward voltage

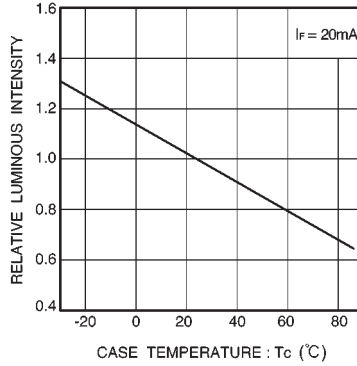


Fig. 9 Luminous intensity vs. case temperature

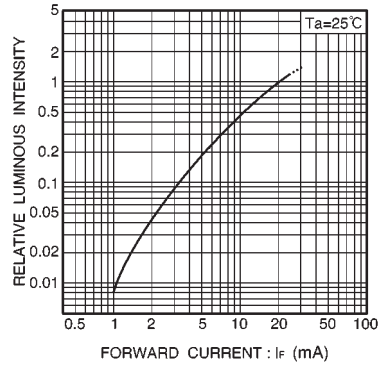


Fig. 10 Luminous intensity vs. forward current

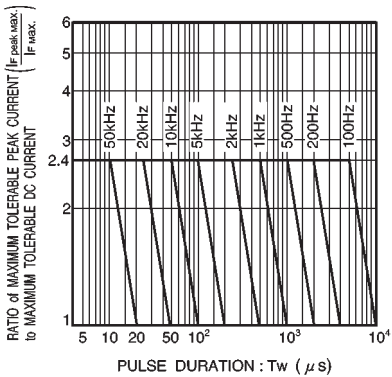


Fig. 11 Maximum tolerable peak current vs. pulse duration

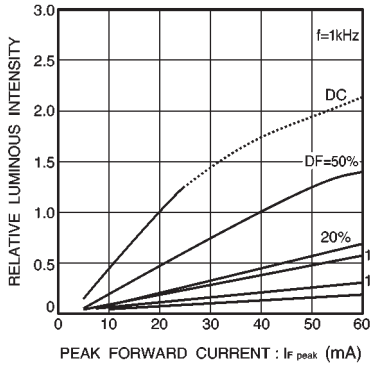


Fig. 12 Luminous intensity vs. peak forward current

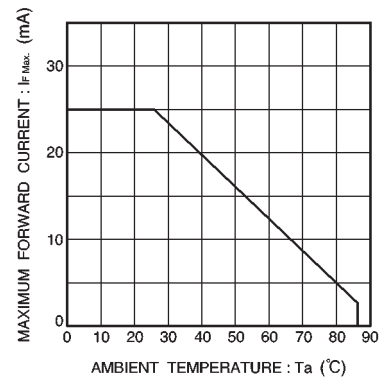


Fig. 13 Maximum forward current vs. ambient temperature

●Electrical characteristic curves 3 (SML-010DT) (orange)

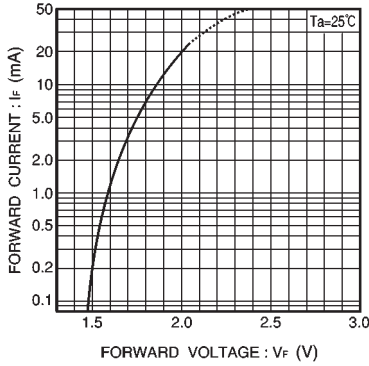


Fig. 14 Forward current vs. forward voltage

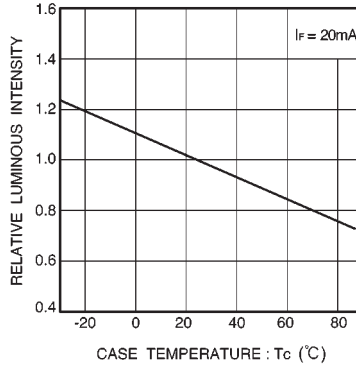


Fig. 15 Luminous intensity vs. case temperature

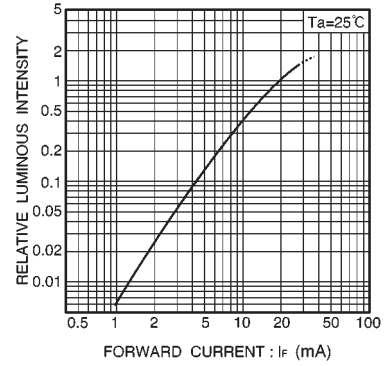


Fig. 16 Luminous intensity vs. forward current

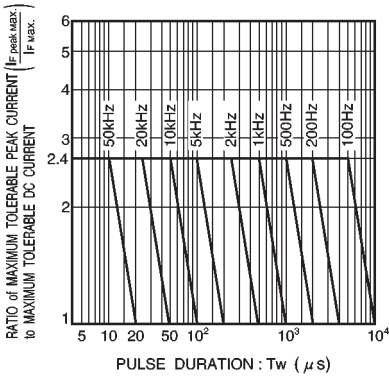


Fig. 17 Maximum tolerable peak current vs. pulse duration

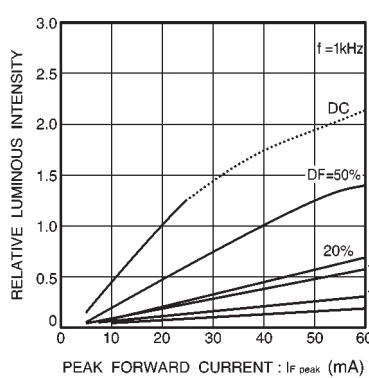


Fig. 18 Luminous intensity vs. peak forward current

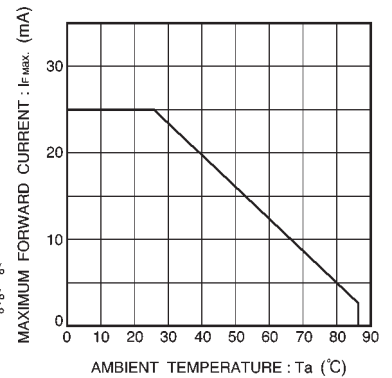


Fig. 19 Maximum forward current vs. ambient temperature

●Electrical characteristic curves 4 (SML-010YT) (yellow)

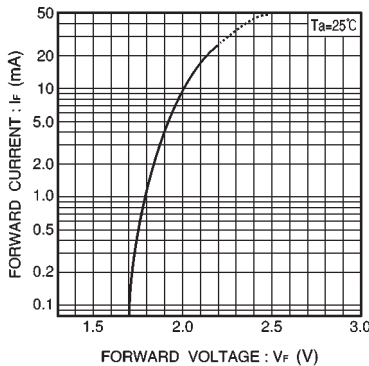


Fig. 20 Forward current vs. forward voltage

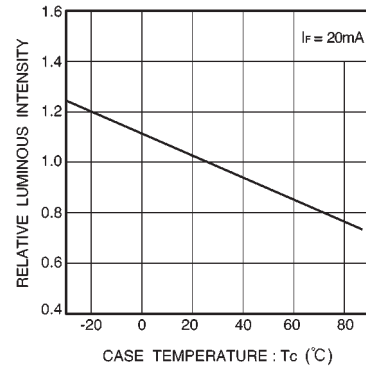


Fig. 21 Luminous intensity vs. case temperature

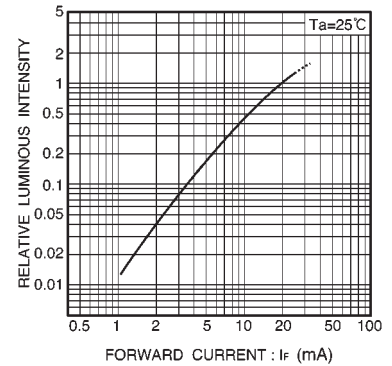


Fig. 22 Luminous intensity vs. forward current

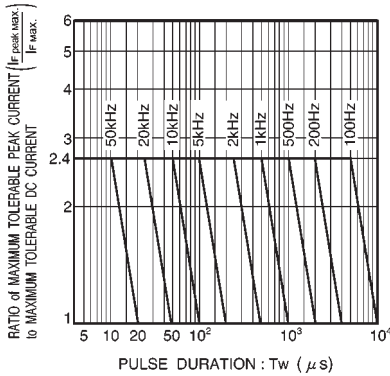


Fig. 23 Maximum tolerable peak current vs. pulse duration

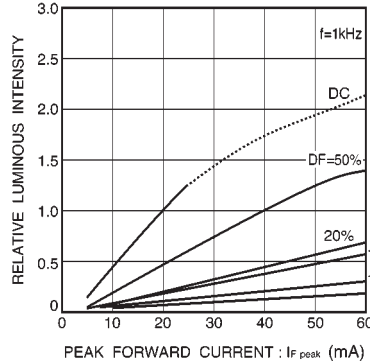


Fig. 24 Luminous intensity vs. peak forward current

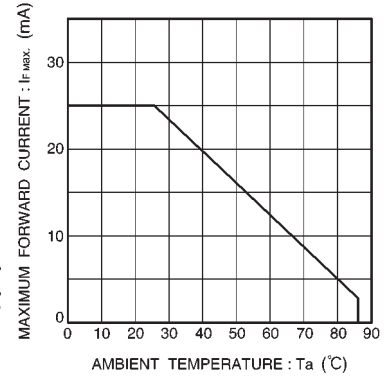


Fig. 25 Maximum forward current vs. ambient temperature

● Electrical characteristic curves 5 (SML-010MT, SML-010FT, SML-010PT) (green)

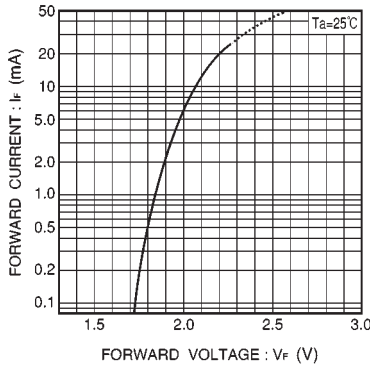


Fig. 26 Forward current vs. forward voltage

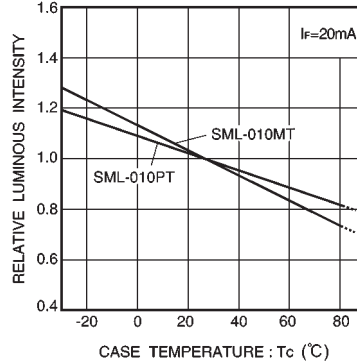


Fig. 27 Luminous intensity vs. case temperature

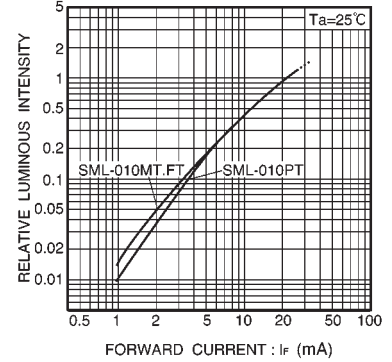


Fig. 28 Luminous intensity vs. forward current

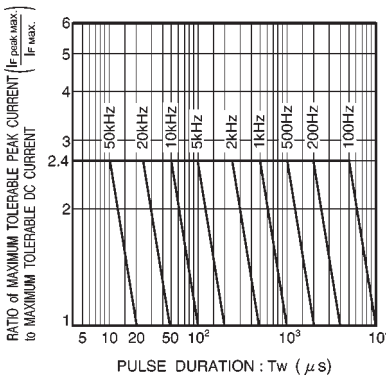


Fig. 29 Maximum tolerable peak current vs. pulse duration

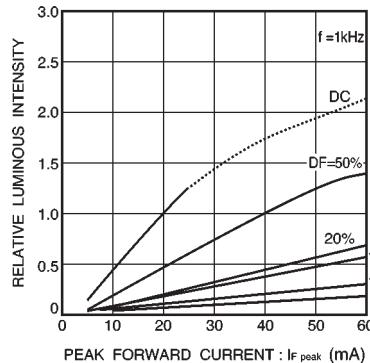


Fig. 30 Luminous intensity vs. peak forward current

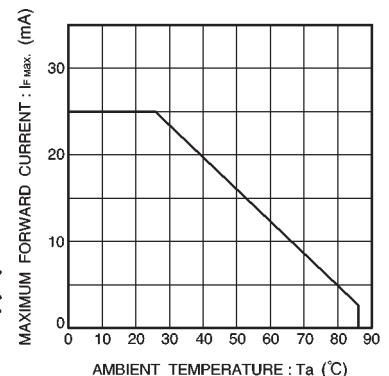


Fig. 31 Maximum forward current vs. ambient temperature